Belman


TYPE 46

TYPE 46
RUBBER EXPANSION JOINT



DN 20 (3/4”) to DN 50 (2”)
Type 46 is a low corrugated Rubber Expansion Joint. Its low corrugated shape minimises flow resistance. It is also characterised by its large axial movement absorption and the wide variety of rubber qualities, so that a suitable rubber compound is available for every application (see material descriptions on the following page).

Type 46 is used in building services engineering, water management, solar and wind energy systems and in engine construction, where it is used specifically for movement and vibration absorption as well as noise damping.

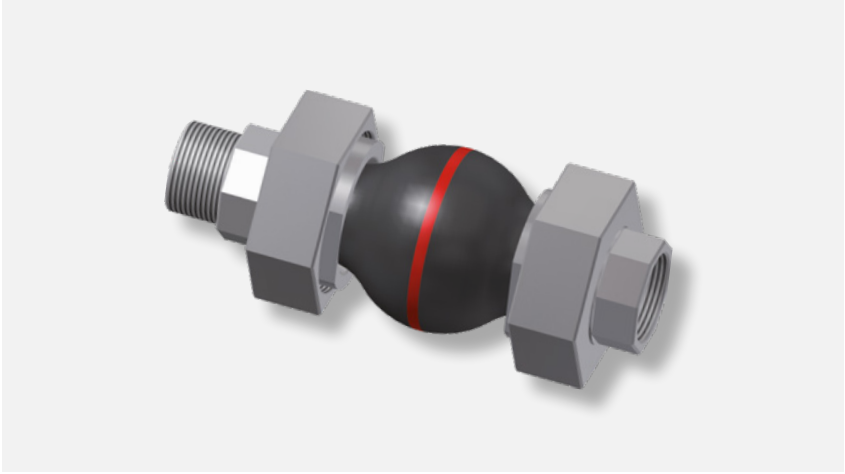

Bellow design
Low corrugated Rubber Bellow with reinforcement and shaped sealing bead with core ring, self-sealing (no additional seals required). Suitable for 3-piece screw connection.

Screw connection
Galvanized steel with female or male threads according to DIN EN 10226. Other standards and materials are possible.

Vacuum resistance
DN 20 to DN 50 vacuum-proof.
Type 46 black EPDM:
DN 20 to 40 up to -300 mbar, DN 50 only with vacuum supporting spiral for vacuum application can be used.

Approvals/conformity
CE, shipbuilding approvals, TÜV tested in accordance with DIN 4809 (detailed overview is available on request).

Accessories
- Flame-resistant protective covers
- Dust and splash protection covers
- Earth cover / sun protection cover

Further information is available on request.

Belman

TYPE 46

SPECIFICATIONS & APPLICATION

BELLOW		BELLOW DESIGN			PERMISSIBLE OPERATING DATA									SURFACE RESISTANCE RO	
Colour code	Colour marking	Core (inner)	Rein-forcement	Cover (outer)	°C	bar	°C	bar	°C	bar	°C	bar	Short-term °C	Core	Cover
Red Sp		EPDM	PEEK	EPDM	-40	10	70	16	100	10	130	8	150	Dissipative	Dissipative
Red		IIR	Polyamide	EPDM	-40	10	50	16	70	12	100	10	120	Dissipative	Dissipative
Yellow		NBR	Polyamide	CR	-20	10	50	16	70	12	90	10	100	Conductive	Conductive
Green		CSM	Polyamide	CSM	-20	10	50	16	70	12	100	10	110	Insulating	Insulating
Black EPDM		IIR	Polyamide	EPDM	-40	10	50	16	70	8	90	6	120	Dissipative	Dissipative
Black CR	–	CR	Polyamide	CR	-25	10	50	16	70	12	90	10	100	Insulating	Insulating
Yellow LT	LT	NBR LT	Polyamide	CR	-40	10	50	16	70	12	90	10	100	Dissipative	Conductive
Yellow St		NBR	Steel cord	CR	-20	10	60	16	70	12	90	10	100	Conductive	Insulating
Yellow HNBR		HNBR	Steel cord	CR	-35	10	60	16	70	12	100	10	120	Dissipative	Insulating

APPLICATION

Type 46 Red Sp
For heating installations according to DIN 4809. For many years of operation under constant loading with hot water and heating water at 100°C/110°C at 10 bar /6 bar operating pressure. Electrically dissipative surface. Not suitable for media with additives containing oil.

Type 46 Red
For hot water, sea water, cooling water with glycol or other chemical additives for treating water, weak acids and weak alkalis and salt solutions, technical alcohols, esters and ketones. Electrically dissipative surface. Not suitable for oil products or cooling water with additives containing oil.

Type 46 Yellow
For oils, lubricants, fuels, gases, city and natural gas (not liquefied) and DIN EN fuels with an aromatic content up to 50%. Electrically conductive surface.

Type 46 Green
For chemicals, aggressive chemical waste water and compressor air containing oil. Electrically insulating surface.

Type 46 Black EPDM
Like Type 46 red, but for maximum 10 bar operating pressure.

Type 46 Black CR
For cold and hot water, swimming pool water, salt water, waste water, cooling water with coolant (e.g. glycool up to 60°C) and anti-corrosive products containing oil, oil mixtures and compressed air containing oil. Electrically insulating surface.

Type 46 Yellow LT
Like Type 46 yellow. Also for liquid gas. Electrically dissipative inner suface, electrically insulating outer surface.

Type 46 Yellow ST
Like Type 46 yellow with additional flame-resistance for up to 30 minutes at 800°C. Electrically conductive inner surface, electrically insulating outer surface.

Type 46 Yellow HNBR
Like Type 46 yellow St, but for temperatures up to +100°C. Electrically dissipative inner surface, electrically insulating outer surface.

Important information:
For aggressive media, please have the material resistance checked by our engineers. Please note the appropriate fix point constructions and plain bearings in your piping system. For more information please refer to the installation instructions. The Bellows must be installed free of torsion and must not be painted or insulated at media temperatures >50°C.

Belman

TYPE 46


DIMENSIONS FOR **POLYAMIDE REINFORCEMENT**

DN	LENGTH	BELLOW			TOTAL LENGTH		WRENCH SIZE			MOVEMENT ABSORPTION*2				WEIGHT	
										AX		LA	AN	Design 1	Design 2
	BL mm	ØA mm	WF*1 mm²	R / RP inches	GL1 mm	GL2 mm	AF1 mm	AF2 mm	AF3 mm	+ mm	- mm	+/- mm	+/- ∠°	kg	kg
20	**130**	81	1700	3/4	214	190	36	80	54	15	30	10	30	2.3	2.5
25	**130**	81	1700	1	214	182	40	80	54	15	30	10	30	2.4	2.4
32	**130**	81	1700	1 1/4	240	190	48	80	54	15	30	10	30	2.6	2.1
40	**130**	86	1800	1 1/2	250	198	53	90	74	15	30	10	30	2.9	2.6
50	**130**	96	3200	2	260	198	66	110	90	15	30	10	30	4.4	3.9

*1: WF = effective area

*2: Utilisation rate of movement absorption decreases at higher temperatures (see technical appendix, which is available on request).

Note: Reduced expansion for steel cord reinforement (Type 46 yellow ST and yellow HNBR). Weights slightly increased.

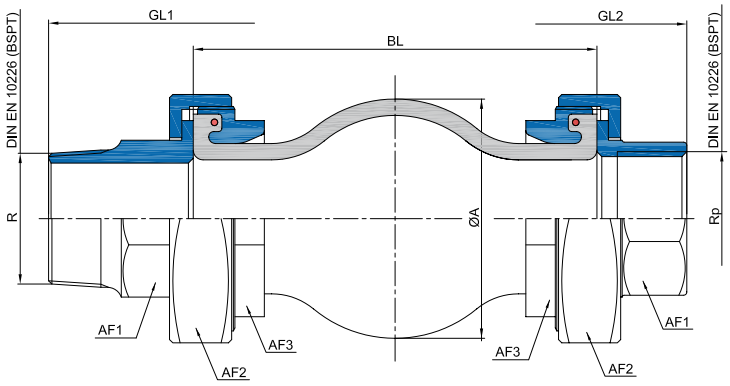

model 1
male thread

model 2
female thread