LEVEL CONTROL VALVE

with Modulating Vertical Float

Model 750-67

Hydraulically operated control valve that controls reservoir filling and reservoir level. Reservoir filling is in response to a hydraulically controlled modulating vertical float that maintains a constant water level, regardless of fluctuating demand (can be used on reservoir intake or outtake according to application).

The BERMAD 700 SIGMA EN/ES series valves are hydraulic globe valves with a raised seat and double chamber actuator. They provide unobstructed flow, effective high-pressure modulation, and minimal cavitation, complying with various potable water standards.




Features & Benefits

- Certified to functional and drinking water standards: EN-1074, NSF-ANSI 61-372, WRAS, AS 5081 and others
- Designed to - Stand up to the toughest conditions
  - Excellent anti-cavitation properties
  - Wide flow range
  - High stability and accuracy
  - Drip tight sealing
- Double chamber design
  - Moderated valve reaction
  - Protected diaphragm
  - Optional operation in very low pressure
  - Moderated closing curve
- Flexible design - Easy addition of features
- Obstacle free flow pass
- V-Port throttling plug (optional) - Very stable at low flow
- High quality materials
- In-line serviceable - Easy maintenance

Typical Applications


- Level control for water reservoirs
- "Always full" - Maximizing the use of reservoir volume
- Potable water, fire protection and grey water

Typical Installation

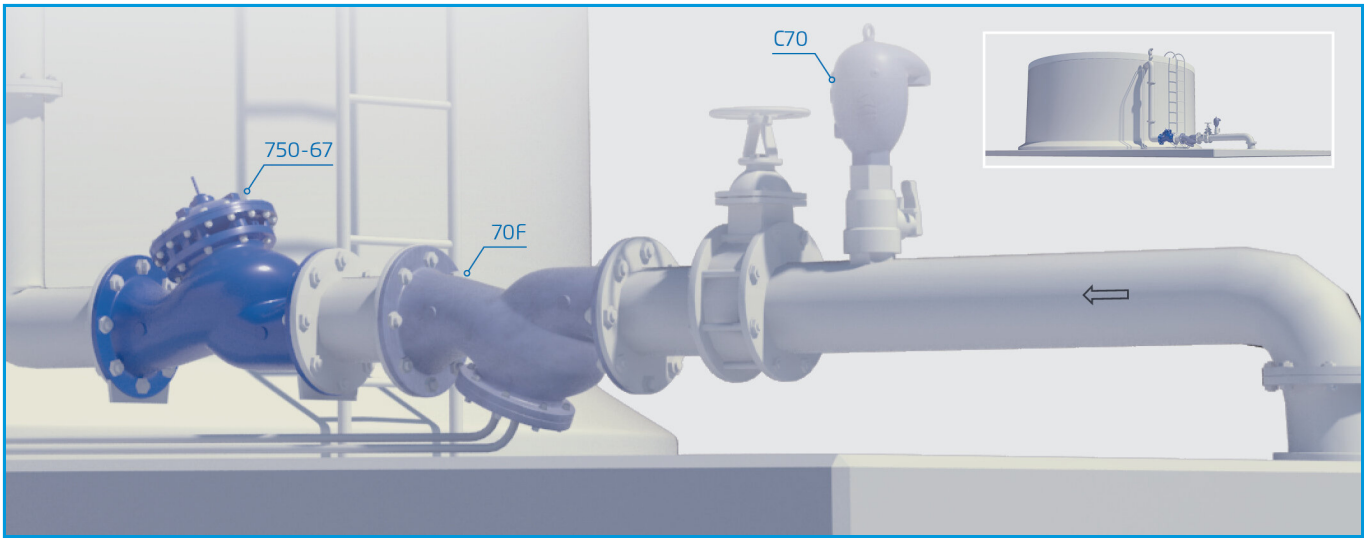


All images in this catalog are for illustration only



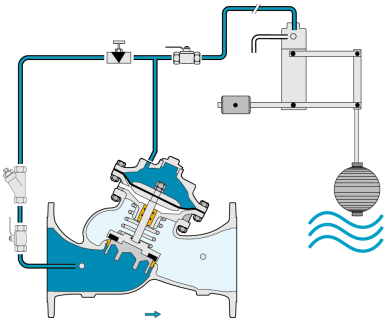

Closed

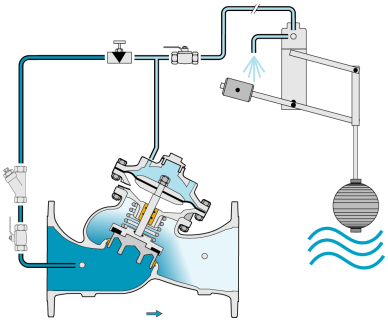

Open

This drawing refers to 1½ – 16"; 40-400 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range:
EN Series: 1½"-16"; DN40-400
ES Series: 2½"-24"; DN65-600
Pattern: "Y" (globe)
Pressure Rating: 16 bar; 25 bar
End Connection: Flanged
Plug Types: Flat disc, V-port, Cavitation cage
Temperature Rating: 80°C
For 60–80°C consult factory

Standard Materials:

Body & Cover: Ductile Iron
Bolts, Nuts & Studs: Stainless Steel
Internals: Stainless Steel, Tin Bronze, Coated Steel & POM
Diaphragm: Fabric-reinforced synthetic rubber
Seals: Synthetic rubber
Coating: Dark blue Fusion bonded epoxy
For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass
Tubing: Stainless Steel or Copper
Fittings: Stainless Steel or Brass

Float standard materials:

Pilot Body: Brass
Elastomers: NBR
Internal Parts: Stainless Steel 316 & Brass
Lever System: Brass
Float: Plastic
Float Rod: Stainless Steel 316
Base Plate: Stainless Steel 316

Float optional materials:

Metal Parts: Stainless Steel 316
Elastomers: EPDM

Notes

- Each extension rod adds 560 mm; 22". One extension rod is supplied.
- Extra counterweight is required if second extension rod is used.
- If inlet pressure is below 0.5 bar / 7psi or above 10 bar /150 psi, consult factory.
- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- See BERMAD float installation recommendation.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the BERMAD website.

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2016-2026 BERMAD CS Ltd