

FIG.Z 84 TTT PN10 DN25/200 L/T

DS-2507
Rev.6
For Reference ☑
For Approval ☐

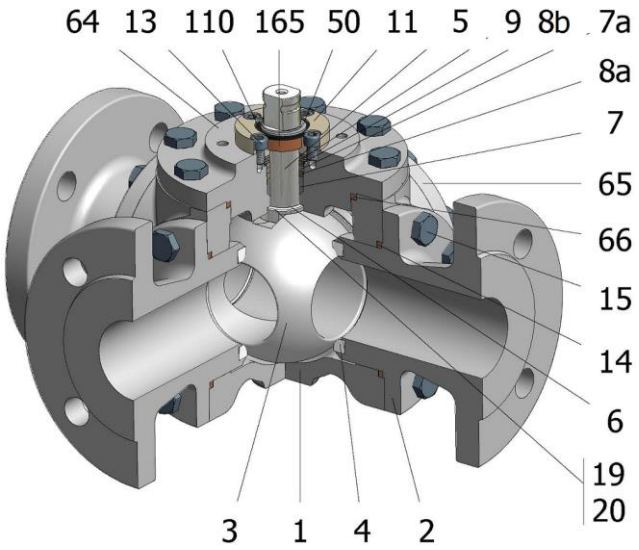

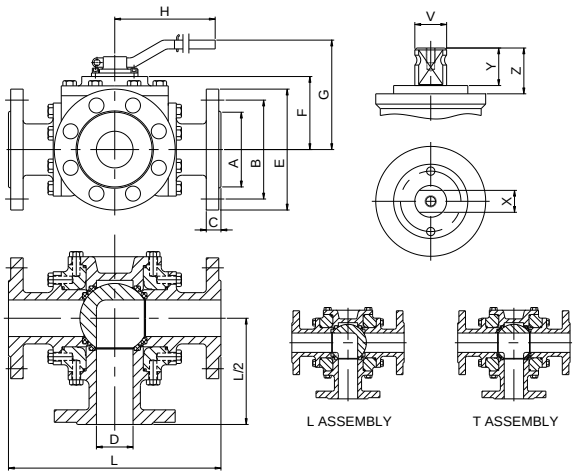

Position	Description	Material
01	Body 1	C.S. 1.0619
02	Body 2	C.S. 1.0619
03	Ball	S.S. 1.4408
04	Seat	PTFE (modified)
05	Stem	S.S. 1.4401
06	Stem seal	PTFE (modified)+FG
07	Stem packing	Graphite
07a	Stem packing 2	PTFE (modified)
08a	Gland packing 1	S.S. 1.4401
08b	Gland packing 2	S.S. 1.4401
09	Spring washer	S.S. 1.4310
11	Cover	S.S. 1.4408
13	Cover bolt	A4-70
14	Body seal 1	PTFE (modified)
15	Body bolt	A2-70
16	Handle	WCB
17	Handle bolt	1.045(8.8)
19	Spring	S.S. 1.4401
20	Antistatic ball	S.S. 1.4401
50	Subjection ring	S.S. 1.4301
64	Body cover	C.S. 1.0619
65	Body blind	C.S. 1.0619
66	Body cover seal	PTFE (modified)
110	Subjection ring seal	S.S. 1.4401 Nitrided
165	Stem bearing	PTFE (modified)+FG

General features


Floating ball.
Split body.
Full bore.
Soft seat.
Three way
Anti Blow out proof stem.
Autoadjustable packing.
Anti static device.
Self-cavity pressure relief.

Standards

Top flange ISO 5211
Flanges EN 1092-01
Testing EN-12266, ISO 5208
Design EN-12516, ISO 17292

Official approvals

TA-LUFT VDI 2440
ISO 15848-1
ATEX 2014/34/EU
PED 2014/68/EU

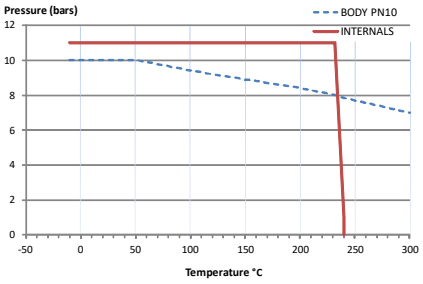

PEKOS GROUP CERTIFICATES:
ISO 9001: 2015 / 2014/68/EU /API-6D

DIMENSIONS & Technical information

DN	PN	D	L	E	A	B	C	F	H	G	V	X	Y	Z	n x d	ISO 5211	Torque	MAST	Weight
25	10	25	230	115	68	85	18	67	185	117	18	14	17	19,5	4 x 14	F05	19	95	14
40	10	40	260	150	88	110	18	82	293	136	22	17	20	30	4 x 18	F07	42	250	22
50	10	50	290	165	102	125	20	90	293	144	22	17	20	30	4 x 18	F07	58	250	30
65	10	65	340	185	122	145	18	109	450	182	28	22	22	40	8 x 18	F10	73	523	47
80	10	80	380	200	138	160	20	132	740	226	36	27	35	50	8 x 18	F12	116	1073	65
100	10	100	430	220	158	180	20	147	740	241	36	27	35	50	8 x 18	F12	145	1073	95
150	10	150	480	285	212	240	22	216	-	-	48	36	40	63	8 x 22	F14	508	2544	180
200	10	201	600	340	268	295	24	258	-	-	48	36	40	63	8 x 22	F14	725	2544	300

*** Depending on service conditions.* * Dimensions are in mm.* * Torque & MAST are in Nm.* * Weight is in Kilograms*

** Torque values have been measured ΔP at maximum rating at room temperature*

Rec del Molinar, 9-P-I. El Circuit - 08160 Montmeló (Barcelona)-Spain

Tel.: (+34) 93 568 92 56
pekos@pekos.es

-The contents of this document are subject to change without prior notice due to the continuous development processes.