FLANGED BUTTERFLY VALVE

TECHNICAL PASSPORT

BUTTERFLY VALVE WITH GEAR BOX
FLANGED MODEL TECFLY
DUCTILE IRON BODY

VP 4548A-08



APPLICATION

The VP butterfly valves are intended to be used in ON/OFF mode or regulation in the fluid transfer circuits.

Area of use: water treatment, pumping irrigation.

Fluids: cold water, hot water, waste water, liquid discharges, alkalis, sodium hydroxide, etc.

GENERAL CHARACTERISTICS

Range: from DN50 to DN300.
Design according to NF EN 593.
Sleeve ensuring tightness in both directions.
Crossing stem. Profiled and reduced thickness disc ensuring a reduced operating torque.
Standardized mounting plate according to ISO 5211.

WORKING CONDITIONS

Maximum working pressure : 16 bar
Maximum working temperature : -15°C / +130°C
Peak temperature: -30°C / +150°C

STANDARDS

Design	Manufacture according to the requirements of the European directive n° 2014/68/UE «Equipment under pressure» : modulate H.
Face to face	Face to face dimensions according to NF EN 558-1 series 20, ISO 5752 series 20, DIN 3202.
Connection	Flanged type ISO PN10/16 (DN50-150) and PN16 (DN200-300) according to EN1092-2.
Tests	Pressure test according to standards EN12266-1, DIN 3230, BS 5154 and ISO 5208: -Body : 24 bar -Seat : 17.6 bar

PRODUCT APPROVALS

CE EAC

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice

Tecofi France
83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - **www.tecofi.fr**


VP4548A-08_EN // Réalisé le 30/10/2024 // Version B

FLANGED BUTTERFLY VALVE

TECHNICAL PASSPORT

VP 4548A-08

CONSTRUCTION

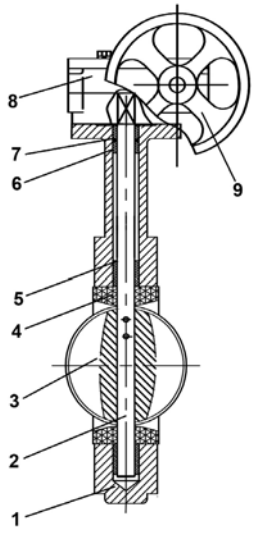


Pos.	Q-ty	Description	Material	Equivalences		
				DIN	ASTM	BS
1	1	Body	Ductile iron EN-GJS-400	GGG40	A536 65-45-12	EN-JS1030
4	1	Stem	Stainless steel 410	X12Cr13		
2	1	Disc	Ductile iron EN-GJS-400	GGG40	A536 65-45-12	EN-JS1030
3	1	Sleeve	Heat EPDM			
5	2	Bushing	FRP			
6	2	Bushing	FRP			
7	1	O ring	NBR			
8	1	Gear box				
9	1	Handwheel	Cast iron EN-GJL-250	GG25	A48 class 40B	1452 Grade 250

Component	Coating
Body	Epoxy powder RAL 5015 250 microns

Anticorrosion protection system:

The valve body is coated with a paint system corresponding to a C5 – Medium durability (C5M) classification, in accordance with the principles of NF EN ISO 12944.

DIMENSIONS

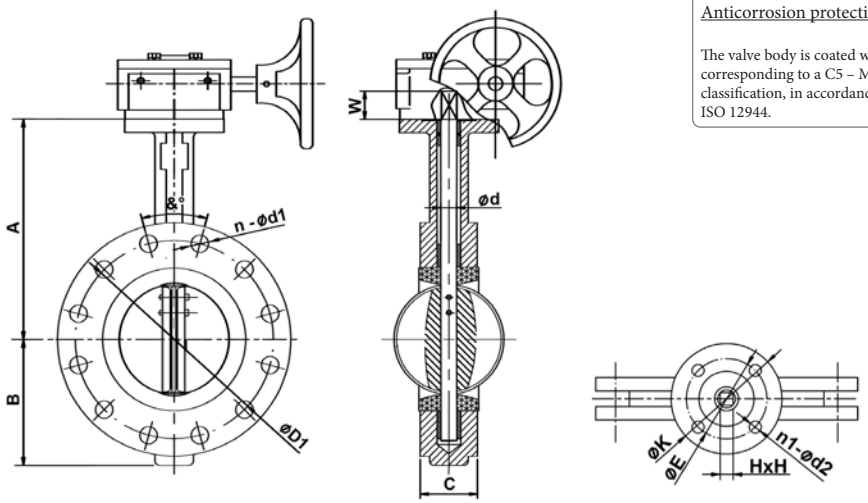

DN		A	B	C	Ød	ISO	ØK	ØE	n1-Ød2	ØD1	n-Ød1	&°	H	W	Torque, Nm			Weight (kg)
mm	inch														0-5 bar	10 bar	16 bar	
50	2"	161	83	42	12.6	F05	65	50	4-Ø7	125	4-Ø19	90	9	32	9	11	12	8.00
65	2"1/2	175	93	44.7	12.6	F05	65	50	4-Ø7	145	4-Ø19	90	9	32	15	18	20	8.30
80	3"	181	100	45.2	12.6	F05	65	50	4-Ø7	160	8-Ø19	45	9	32	22	25	30	9.52
100	4"	200	112	52.1	15.8	F07	90	70	4-Ø10	180	8-Ø19	45	11	32	39	43	50	12.40
125	5"	213	125	54.4	18.9	F07	90	70	4-Ø10	210	8-Ø19	45	14	32	60	67	77	13.70
150	6"	226	145	55.8	18.9	F07	90	70	4-Ø10	240	8-Ø23	45	14	32	94	110	121	16.30
200	8"	260	173	60.6	22.1	F10	125	102	4-Ø12	295	12-Ø23	45	17	45	165	201	242	26.80
250	10"	292	203	65.6	28.5	F10	125	102	4-Ø12	350	12-Ø28	30	22	45	253	310	352	39.00
300	12"	337	242	76.9	31.6	F10	125	102	4-Ø12	400	12-Ø28	30	22	45	352	473	490	59.80

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice

Tecofi France
83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - **www.tecofi.fr**

ISO 9001
ISO 14001
BUREAU VERITAS Certification

VP4548A-08_EN // Réalisé le 30/10/2024 // Version B