VÁLVULAS DE MARIPOSA / BUTTERFLY VALVES

VÁLVULA DE MARIPOSA BIEXCÉNTRICA EN A.INOX. WAFER ANSI 150
DOUBLE ECCENTRIC BUTTERFLY VALVE. WAFER TYPE. S.STEEL. ANSI 150

VALVESEAL
valves & sealing solutions

TF-DE-BFV-SS-W150



CE · Ex · FIRE SAFE ISO 10497 · SIL

ISO 9001 BUREAU VERITAS Certification

UTILIZACIÓN / APPLICATION:
Calefacción, geotermia, frío industrial, construcción naval, petroquímica.
Heating, geothermics, industrial cool, shipbuilding, petrochemical.


CARACTERÍSTICAS GENERALES/ GENERAL CHARACTERISTICS:
Válvulas Wafer de doble excentricidad / Double Offset wafer type design.
Rango desde DN2" hasta DN24" / Range from ND2" up to ND24".
Cierre bidireccional / Bidirectional with preferential flow indicated by the arrow.
Estanqueidad 100% / 100% tightness.
Palanca de 10 posiciones hasta DN150 / 10 positions handle with locking device up to ND150.
Pletina montaje ISO 5211 / ISO 5211 mounting pad.

NORMATIVAS / STANDARDS:
Diseño / Design according to: API 609.
Fabricación / Manufacture according to: ISO 9001: 2015.
Distancia entre caras / Face to Face: EN 558-1 Serie 20.
Montaje entre bridas / Mounting between flanges B16.5 Class 150.
Marcado según / Marking according to: MSS SP-25.
Pruebas de estanqueidad / Tightness Test according to: ISO 5208 Rate A.
Anti-fuego según / Fire Safe according to: ISO 10497 : 2010.
Directiva europea 2014/68/UE CE Nº 0035 Categoría de riesgo III Módulo H
EU directive 2014/68/EU CE Nº 0035. Risk Category III module H.
ATEX Group II Category 2 G/2D Zone 1 & 21. Zone 2 & 22 according to directive 2014/34/EU.
SIL2 according to IEC/EN 61508.

CONDICIONES DE SERVICIO / WORKING CONDITIONS:
Máxima presión de trabajo / Maximum Working Pressure: 20 bar. Vapor / Steam: 10 bar.
Temperatura máxima de trabajo / Maximum Working Temperature: - 29 °C / + 210 °C.

MATERIALES / CONSTRUCTION:

No.	Pieza / Part	Material / Material
1	Cuerpo / Body	ASTM A351 CF8M
2	Disco / Disc	ASTM A351 CF8M
3	Eje / Shaft	ASTM A564 630
4	Asiento / Seat	PTFE filled with 15% Graphite
4-1	Asiento Metálico / Metal Seat	Inconel 718
4-2	Junta / Gasket	Graphite
5	Retén / Retainer	ASTM A351 CF8
6	Cojinete / Bushing	PTFE + AISI 316
7	Prensa / Gland	ASTM A351 CF8
8	Empaque Prensa / Gland Packing	Graphite
9	Tapa / Bottom Cover	ASTM A351 CF8M
9-1	Junta Tapa / Bottom Cover Gasket	Graphite
10	Horquilla / Yoke	ASTM A351 CF8
11	Perno tope / Stop Stud	ASTM A193 Gr B8M
12	Placa Bloqueo / Lock Plate	PTFE + 15% Graphite + AISI 316
13	Perno / Stud	ASTM A193 Gr B8
14	Tuerca / Nut	ASTM A194 Gr B
15	Tornillo / Bolt	ASTM A193 Gr B8

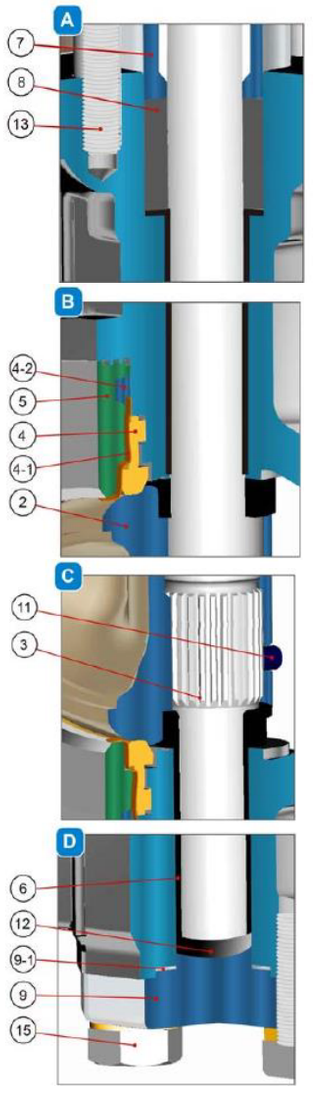


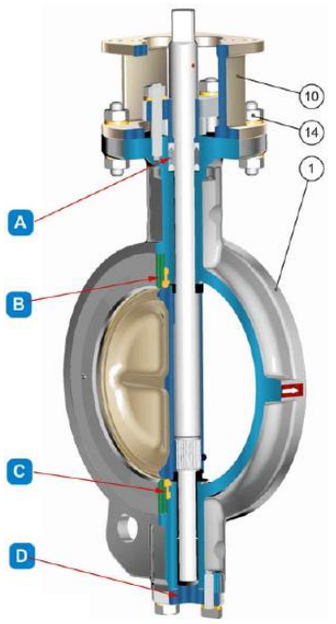


GRÁFICO PRESIÓN / TEMPERATURA:
PRESSURE / TEMPERATURE CHART:

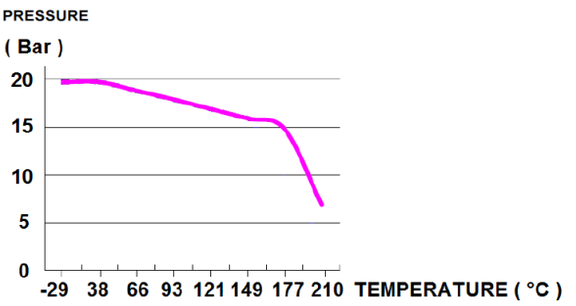

Las especificaciones del producto están sujetas a modificaciones sin previo aviso. The specifications of the presented products are open to modifications without previous advice.

VALVESEAL, S.L. C/ Ronda Maiols, 1 Edificio BMC Pta 3ª Of.328. 08192 Sant Quirze del Vallés (Barcelona) -Spain. Telf./*Phone* +34 937701960 - Email valveseal@valveseal.es
C/ Fuente de la apretura, 23. 28694 Chapineria (Madrid) - Spain. Telf. / *Phone* +34 910133362
www.valveseal.es


VÁLVULA DE MARIPOSA BIEXCÉNTRICA EN A.INOX. WAFER ANSI 150

DOUBLE ECCENTRIC BUTTERFLY VALVE. WAFER TYPE. S.STEEL. ANSI 150

VALVESEAL
valves & sealing solutions


TF-DE-BFV-SS-W150

DIMENSIONES / *DIMENSIONS* : DN50 - DN150




DN *ND*	NPS	E	A	B	ØM	H3	M1	P	E1	E2	ØDe	ØDi	Min Pipe Diameter	Peso *Weight*
50	2"	43	99	118	90	60	70	47	49,5	2	92	37	49	3,90
65	2.1/2"	46	110	125,0	90	60	70	76	62,3	15	108	63	62	4,50
80	3"	47	128	140	125	70	102	91	65,9	22	126	78	78	7,00
100	4"	53	150	157	125	70	102	103	93	25	153	95	93	9,00
125	5"	57	163	170	125	70	102	129	120	36	184	118	120	12,00
150	6"	56	176	185	125	70	102	156	149	50	212	143	149	13,50

DIMENSIONES / *DIMENSIONS* : DN200 - DN400




DN *ND*	NPS	E	A	B	ØM	H3	M1	P	E1	E2	ØDe	ØDi	Min Pipe Diameter	Peso *Weight*
200	8"	62	206	220	150	80	125	202	196	70	268	187,6	196	22,00
250	10"	68	238	260	150	80	125	248	243	90	326	235,5	243	32,00
300	12"	78	269	290	175	100	160	290	289	106	375	282	289	48,00
350	14"	78	306	326	175	100	160	328	329	125	416	322	329	66,00
400	16"	102	342	370	210	120	195	382	377	140	476	371	377	107,00

DIMENSIONES / *DIMENSIONS* : DN450 - DN600

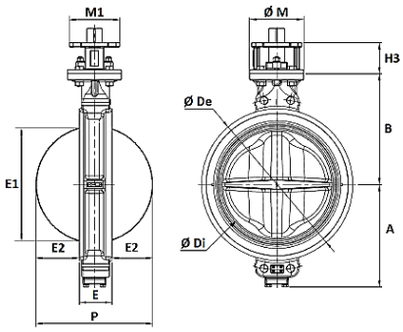


DN *ND*	NPS	E	A	B	ØM	H3	M1	P	E1	E2	ØDe	ØDi	Min Pipe Diameter	Peso *Weight*
450	18"	114	370	395	210	120	195	428	423	157	534	418	423	130,00
500	20"	127	399	430	210	120	195	481	471	177	588	466	471	263,00
600	24"	154	455	490	300	150	300	574	572	210	692	570	572	278,00

DIMENSIONES EJE Y PLETINA ISO / *DIMENSIONS ISO MOUNTING PAD & STEM:*

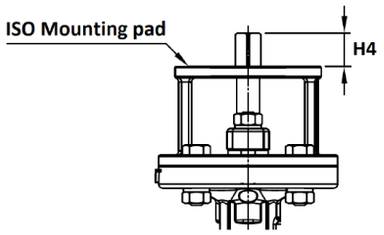

DN *ND*	C	H4	ISO	ØK	N x ØZ	ØK1	ISO1	N x ØZ1
50	11	18	F07	70	4 X 8	50	F05	4 X 6
65	11	18	F07	70	4 X 8	50	F05	4 X 6
80	14	23	F10	102	4 X 10	70	F07	4 X 8
100	14	23	F10	102	4 X 10	70	F07	4 X 8
125	17	23	F10	102	4 X 10	70	F07	4 X 8
150	17	23	F10	102	4 X 10	70	F07	4 X 8
200	19	28	F12	125	4 X 12	102	F10	4 X 10
250	22	28	F12	125	4 X 12	102	F10	4 X 10
300	27	37	F14	140	4 X 16	125	F12	4 X 12
350	27	37	F14	140	4 X 16	125	F12	4 X 12
400	36	47	F16	165	4 X 22	140	F14	4 X 16
450	36	47	F16	165	4 X 22	140	F14	4 X 16
500	46	56	F16	165	4 X 22	140	F14	4 X 16
600	46	56	F25	254	8 X 17			



The specifications of the presented products are open to modifications without previous advice.

Las especificaciones del producto están sujetas a modificaciones sin previo aviso.

VALVESEAL, S.L. C/ Ronda Maiols, 1 Edificio BMC Pta 3ª Of.328. 08192 Sant Quirze del Vallés (Barcelona) -Spain. Telf./*Phone* +34 937701960 - Email valveseal@valveseal.es
C/ Fuente de la apretura, 23. 28694 Chapineria (Madrid) - Spain. Telf. / *Phone* +34 910133362
www.valveseal.es