Basket strainers without valve, flanged PN 10



Art. 105


Flanges: UNI EN 1092-2 PN 10
DIN 3247 Installation: at the beginning of suction pipes
APPLICATIONS ° Ogni volta che è necessaria
la filtrazione dell'acqua per aspirazione, verniciatura
epossidica adatta per applicazioni di acqua potabile.

The basket strainers, positioned at the beginning of the suction pipe are suitable to filter any impurity from the pipeline. The basket is manufactured in stainless steel 304 and perforation is 8mm.

Materials

body	cast iron GG25, EN-GJL-250
basket	stainless steel 304
painting	epoxy

Dimensions

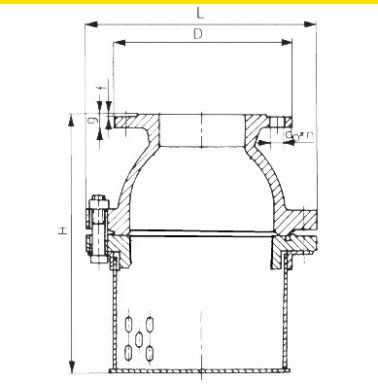

DN	L mm.	H mm.	D mm.	Weight kg.
40	170	137	150	5
50	180	157	165	5
65	200	172	185	7
80	240	186	200	10
100	270	245	220	15
125	310	263	250	20
150	360	343	285	29
200	440	421	340	42
250	520	469	395	71
300	570	609	445	105

Valvotubi ind. S.r.l. ®
Via M.Monti 30/b
48123 Ravenna, Italy

ph +39 0544 452279
fax +39 0544 451148

info@valvotubi.it
www.valvotubi.it