Vexve underground ball valve, air release valve / short

Series 231/I, female threads / welding EN (DIN), reduced bore, DN 25-50, PN 25



DN 25-50

Materials

Body	DN 25-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Extension pipe	DN 25-50: Steel, P235GH (1.0345)
Ball	DN 25-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 25-50: PTFE+C
Stem	DN 25-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 25-50: FPM/NBR
Plug	DN 25-50: DZR brass

Mounting

female threads / welding EN (DIN)

Operation

DN 25-50	composite 6k19 positioning arrow (standard color blue, red available)


Equipments

DN 25-50 are equipped with: plug

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

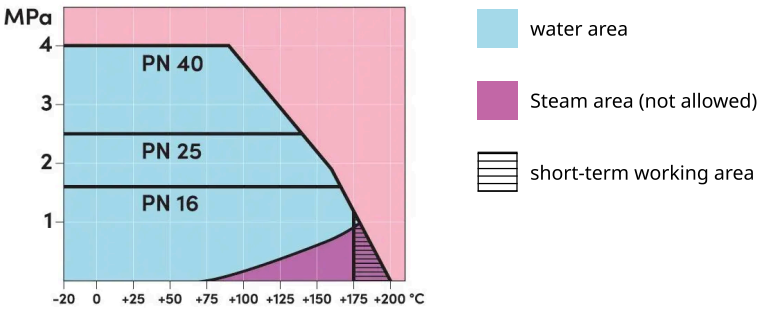


DN 25-50

Copyright © Vexve Oy - All rights reserved

Vexve underground ball valve, air release valve / short

Series 231/I, female threads / welding EN (DIN), reduced bore, DN 25-50, PN 25



DN 25-50

Dimensions

DN	PN	Product no.	D	D1	D2	H	H1	L	L1	L2	L3	S	HEX	HEX19	Kg
25	25	231025X/I	20.0	33.7	48.3	82	23.0	412	395.0	338	255	4.0	19	19	1.8
40	25	231040X/I	32.0	48.3	70.0	90	24.0	416	395.0	319	215	4.5	27	19	3.0
50	25	231050X/I	40.0	60.3	76.1	98	25.0	416	392.0	303	194	4.0	27	19	3.8

Copyright © Vexve Oy - All rights reserved