Vexve condensate valve

Series 173, flange / flange, reduced bore, DN 15-150, PN 25-40



DN 15-150

Materials

Body	DN 15-150: Steel, P235GH (1.0345)
Ball	DN 15-150: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-150: PTFE+GF
Stem	DN 15-100: Stainless steel, X8CrNiS18-9 (1.4305)
	DN 125-150: Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 15-50: FFKM/FFKM
	DN 65-150: FFKM/EPDM

Mounting

flange / flange	EN 1092-1
	Available PN 10, 16, 25, 40


Operation

DN 15-150	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +250 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.
*) Not for superheated steam.

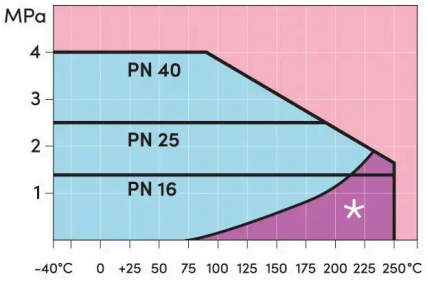


DN 15-150

Copyright © Vexve Oy - All rights reserved

Vexve condensate valve

Series 173, flange / flange, reduced bore, DN 15-150, PN 25-40



DN 15-150

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	Kg
15	40	173015X	147.0	10.0	95	65	14	116	33.0	130	1.8
20	40	173020X	147.0	15.0	105	75	14	120	34.0	150	2.5
25	40	173025X	147.0	20.0	115	85	14	122	33.0	160	3.0
32	40	173032X	147.0	25.0	140	100	18	126	32.0	180	4.6
40	40	173040X	147.0	32.0	150	110	18	131	34.0	200	5.1
50	40	173050X	147.0	40.0	165	125	18	138	35.0	230	6.8
65	25	173065/25	278.0	50.0	185	145	18	156	62.0	270	10.0
80	25	173080/25	278.0	65.0	200	160	18	168	68.0	280	13.0
100	25	173100/25	278.0	80.0	235	190	22	218	101.0	300	20.2
125	25	173125/25	400.0	100.0	270	220	26	253	101.0	325	30.0
150	25	173150/25	600.0	125.0	300	250	26	272	107.0	350	39.0

Copyright © Vexve Oy - All rights reserved