Vexve stainless steel ball valve

Series 232/NPT, female threads / female threads, reduced bore, DN 10-50, PN 40

DN 10-50

Materials

Body	DN 10-50: Stainless steel, AISI316L (1.4404)
Ball	DN 10-50: Stainless steel, AISI316L (1.4404)
Ball seal	DN 10-50: PTFE+C
Stem	DN 10-50: Stainless steel, AISI316L (1.4404)
Stem seal	DN 10-50: FPM/NBR

Mounting

female threads / female threads


Operation

DN 10-50	composite handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

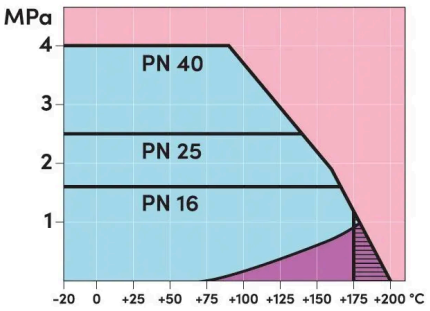

DN 10-50

water area

Steam area (not allowed)

short-term working area

Copyright © Vexve Oy - All rights reserved

DN 10-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	Kg
10	40	232010X/NPT	130.0	10.0	NPT 3/8	33.7	32	119	86.0	76	0.4
15	40	232015X/NPT	130.0	10.0	NPT 1/2	33.7	32	119	84.0	86	0.4
20	40	232020X/NPT	130.0	15.0	NPT 3/4	42.4	32	123	85.0	100	0.5
25	40	232025X/NPT	130.0	20.0	NPT 1	48.3	32	125	84.0	115	0.7
32	40	232032X/NPT	130.0	25.0	NPT 1 1/4	60.3	32	129	85.0	130	1.1
40	40	232040X/NPT	130.0	32.0	NPT 1 1/2	70.0	32	133	84.0	150	1.5
50	40	232050X/NPT	130.0	40.0	NPT 2	76.1	32	140	85.0	180	2.4

Copyright © Vexve Oy - All rights reserved