Vexve stainless steel ball valve

Series 231/MM, female thread / welding, NS-norm, reduced bore, DN 10-50, PN 40

DN 10-50

Materials

Body	DN 10-50: Stainless steel, AISI316L (1.4404)
Ball	DN 10-50: Stainless steel, AISI316L (1.4404)
Ball seal	DN 10-50: PTFE+C
Stem	DN 10-50: Stainless steel, AISI316L (1.4404)
Stem seal	DN 10-50: FPM/NBR

Mounting

female thread / welding, NS-norm

Operation


DN 10-50	composite handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

DN 10-50

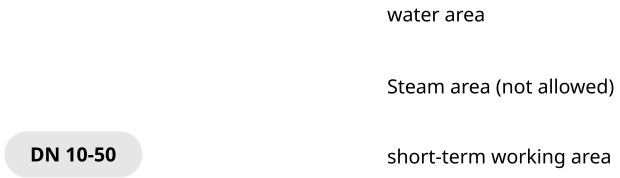

Copyright © Vexve Oy - All rights reserved

DN 10-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	D4	H	H1	L	L1	S	Kg
10	40	231010X/MM	130.0	10.0	13.5	33.7	Rp 3/8	32	119	86.0	153	115.0	1.6	0.5
15	40	231015X/MM	130.0	10.0	20.0	33.7	Rp 1/2	32	119	86.0	158	115.0	2.0	0.6
20	40	231020X/MM	130.0	15.0	25.0	42.4	Rp 3/4	32	123	87.0	165	115.0	2.0	0.7
25	40	231025X/MM	130.0	20.0	30.0	48.3	Rp 1	32	125	86.0	172	115.0	2.0	1.0
32	40	231032X/MM	130.0	25.0	36.0	60.3	Rp 1 1/4	32	129	85.0	195	130.0	2.0	1.4
40	40	231040X/MM	130.0	32.0	45.0	70.0	Rp 1 1/2	32	133	87.0	205	130.0	2.5	1.9
50	40	231050X/MM	130.0	40.0	54.0	76.1	Rp 2	32	140	88.0	240	150.0	2.6	2.9

Copyright © Vexve Oy - All rights reserved