Vexve steel ball valve

Series 104/S, welding / welding, EN (DIN), reduced bore, DN 100-200, PN 25



DN 100-200

Materials

Body	DN 100-200: Steel, P235GH (1.0345)
Ball	DN 100-200: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 100-200: PTFE+C
Stem	DN 100: Stainless steel, X8CrNiS18-9 (1.4305)
	DN 125-150: Stainless steel, X17CrNi16-2 (1.4057)
	DN 200: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 100-200: FPM

Mounting

welding / welding, EN (DIN)


Operation

DN 100-200	manual gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

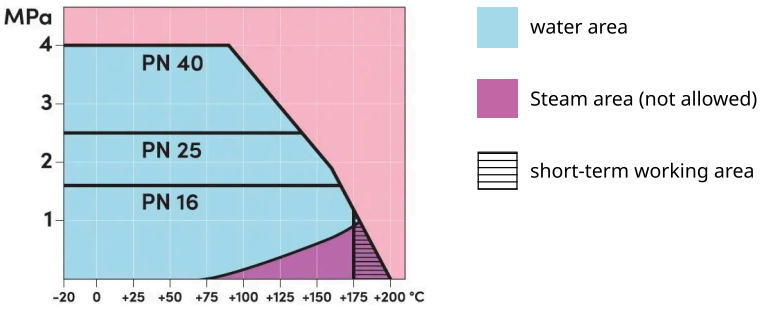


DN 100-200

19.1.2026 - All data subject to change

Copyright © Vexve Oy - All rights reserved

Vexve steel ball valve

Series 104/S, welding / welding, EN (DIN), reduced bore, DN 100-200, PN 25



DN 100-200

Dimensions

DN	PN	Product no.	A	B	C	D	D1	D2	D3	E	H	L	S	S1	Kg
100	25	104100/S	186.0	196	53	80.0	114.3	139.7	125	239	105	325	3.6	6.3	18
125	25	104125/S	224.0	216	53	100.0	139.7	177.8	200	259	112	325	4.0	6.3	20
150	25	104150/S	224.0	236	53	125.0	168.3	219.1	200	279	118	350	4.1	7.1	25
200	25	104200/S	268.0	244	69	150.0	219.1	273.0	250	293	92	400	4.5	7.1	49

Copyright © Vexve Oy - All rights reserved