Vexve steel ball valve

Series 150/GS, welding / welding, GOST, full bore, DN 65-400, PN 25



DN 65-125



DN 150-200



DN 250-400

Materials

Body	DN 65-400: Steel, P235GH (1.0345)
Ball	DN 65-400: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 65-400: PTFE+C
Stem	DN 65-80: Stainless steel, X8CrNiS18-9 (1.4305)
	DN 100: Stainless steel, X17CrNi16-2 (1.4057)
	DN 200-400: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 65-400: FPM

Mounting

welding / welding, GOST


Operation

DN 65-200	zinc-plated steel handle
DN 250-400	available with manual gear or with an electric or hydraulic actuator

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

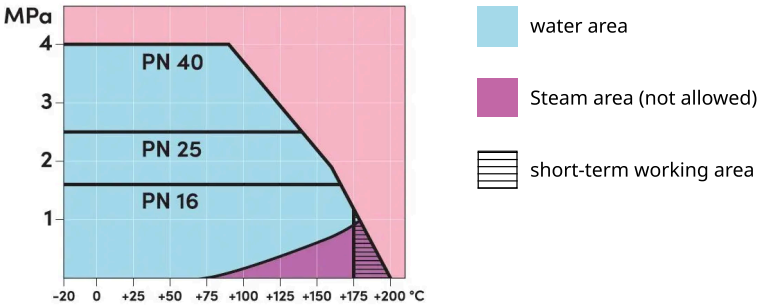


DN 65-400


Copyright © Vexve Oy - All rights reserved

Vexve steel ball valve


Series 150/GS, welding / welding, GOST, full bore, DN 65-400, PN 25



DN 65-125



DN 150-300



DN 350-400

Dimensions

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	Kg
65	25	150065/GS	278.0	65.0	76.1	121.0	169	74.0	300	3.2	6.7
80	25	150080/GS	279.0	80.0	89.0	146.0	218	114.0	325	3.6	10.5
100	25	150100/GS	400.0	100.0	108.0	177,8	253	117.0	325	4.0	18.1
200	25	150200/GS	1200.0	200.0	219.0	355.6	343	135.0	400	6.0	60.0
250	25	150250/GS		250.0	273.0	419.0		148.0	530	6.0	88.0
300	25	150300/GS		290.0	325.0	508.0		206.0	686	7.0	177.0
350	25	150350/GS		340.0	377.0	610.0		267.0	762	7.0	258.0
400	25	150400/GS		390.0	426.0	660.0		300.0	914	7.0	547.0

Copyright © Vexve Oy - All rights reserved