Vexve stainless steel ball valve

Series 234xx1, flange / flange, reduced bore, DN 100-300, PN 16



DN 100-300

Materials

Body	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 100-300: PTFE+C
Stem	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 100-300: FPM/NBR

Mounting

flange / flange	EN 1092-1
	Available PN 10, 16, 25, 40


Operation

DN 100-300	manual gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

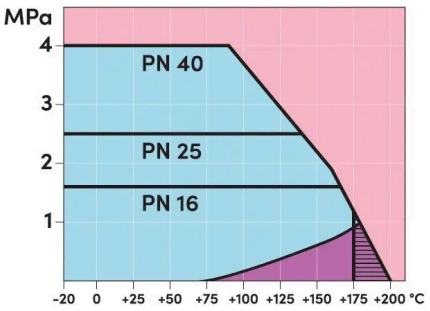


DN 100-300


Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 234xx1, flange / flange, reduced bore, DN 100-300, PN 16



DN 100-300



DN 100-300

Dimensions

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	Kg
100	16	234101	187.0	159	53	80.0	220	180	18	125	202	68.0	300	21
125	16	234126	224.0	183	53	100.0	250	210	18	200	225	79.0	325	29
150	16	234151	224.0	203	53	125.0	285	240	22	200	246	85.0	350	34
200	16	234201	268.0	244	69	150.0	340	295	22	250	293	92.0	400	57
250	16	234251	301.0	294	97	200.0	405	355	26	300	345	108.0	550	105
300	16	234301	424.0	349	138	250.0	460	410	26	600	422	132.0	565	176

NOTE: DN 250 and DN 300 allowed only for PED 2014/68/EU Group 1 and Group 2 fluids. Contact manufacturer if medium is gas or vapour.

Copyright © Vexve Oy - All rights reserved