Vexve steel ball valve

Series 154/GS, welding / welding, GOST, full bore, DN 200-400, PN 25



DN 200-400

Materials

Body	DN 200-400: Steel, P235GH (1.0345)
Ball	DN 200-400: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 200-400: PTFE+C
Stem	DN 200-400: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 200-400: FPM

Mounting

welding / welding, GOST


Operation

DN 200-400	manual gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

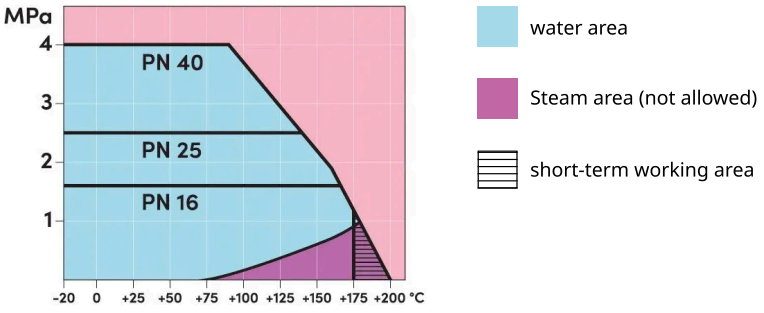


DN 200-400


Copyright © Vexve Oy - All rights reserved

Vexve steel ball valve


Series 154/GS, welding / welding, GOST, full bore, DN 200-400, PN 25



DN 200-300



DN 200-400



DN 350-400

Dimensions

DN	PN	Product no.	A	B	C	D	D1	D2	D3	E	H1	L	S	Kg
200	25	154200/GS	301.0	294	97	200.0	219	355.6	300	345	135.0	400	6	78
250	25	154250/GS	363.0	343	117	250.0	273	419.0	600	413	148.0	530	6	123
300	25	154300/GS	363.0	418	117	290.0	325	508.0	600	487	206.0	686	7	216
350	25	154350/GS	440.0	500	138	340.0	377	610.0	500	573	267.0	762	7	305
400	25	154400/GS	471.0	576	180	390.0	426	660.0	500	648	300.0	914	7	603

Copyright © Vexve Oy - All rights reserved