Vexve underground ball valve

Series 157/SL, welding / welding, EN (DIN), full bore, DN 25-300, PN 25



DN 25-125



DN 150-300

Materials

Body	DN 25-300: Steel, P235GH (1.0345)
Ball	DN 25-300: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 25-300: PTFE+C
Stem	DN 25-80: Stainless steel, X8CrNiS18-9 (1.4305)
	DN 100-125: Stainless steel, X17CrNi16-2 (1.4057)
	DN 150-300: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 25-300: FPM
Top of Stem	DN 25-300: Stainless steel, X5CrNi18-10 (1.4301)

Mounting

welding / welding, EN (DIN)


Operation

DN 25-125	available with a T-key
DN 150-300	available with portable planet gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

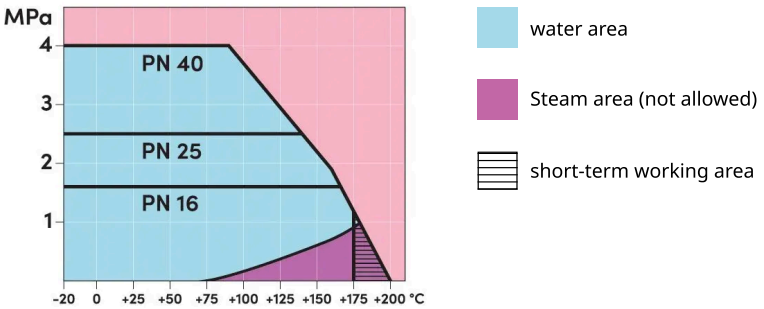


DN 25-300


Copyright © Vexve Oy - All rights reserved

Vexve underground ball valve

Series 157/SL, welding / welding, EN (DIN), full bore, DN 25-300, PN 25



DN 25-125



DN 150-300

Dimensions

DN	PN	Product no.	D	D1	D2	D3	D4	H1	H2	H3	L	S1	S2	6K1	6K2	Kg
25	25	157025/SL	25.0	33.7	60.3	33.7	36	386.0	369	341	1500	4.0	2.6	19		7
32	25	157032/SL	32.0	42.4	70.0	33.7	36	400.0	379	350	1500	4.5	2.6	19		9
40	25	157040/SL	40.0	48.3	76.1	33.7	36	406.0	382	353	1500	3.6	2.6	19		9
50	25	157050/SL	50.0	60.3	101.6	42.4	36	415.0	384	349	1500	4.0	2.9	19		13
65	25	157065/SL	65.0	76.1	121.0	42.4	36	425.0	386	349	1500	5.0	2.9	19		19
80	25	157080/SL	80.0	88.9	146.0	60.3	60	449.0	405	354	1500	4.0	3.2	27		22
100	25	157100/SL	100.0	114.3	177.8	60.3	60	454.0	397	344	1500	6.3	3.6	27		39
125	25	157125/SL	125.0	139.7	219.1	60.3	60	476.0	406	345	1500	6.3	4.0	27		52
150	25	157150/SL	150.0	168.3	273.0	76.1		517.0	432	349	1500	7.1	4.5	50	90	92
200	25	157200/SL	200.0	219.1	355.6	88.9		560.0	450	350	1500	7.1	5.0	50	90	140
250	25	157250/SL	250.0	273.0	457.0	101.6		610.0	473	350	1500	8.8	5.0	50	90	198
300	25	157300/SE	290.0	323.9	508.0	139.7		636.0	474	351	1800	8.8	5.6	50	90	257

Other stem heights also available.

Copyright © Vexve Oy - All rights reserved