Vexve steel ball valve

Series 101/G, male threads and plug / welding, EN (DIN), reduced bore, DN 15-25, PN 40



DN 15-25

Materials

Body	DN 15-25: Steel, P235GH (1.0345)
Ball	DN 15-25: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-25: PTFE+C
Stem	DN 15-25: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-25: FPM

Mounting

male threads and plug / welding, EN (DIN)


Operation

DN 15-25	composite handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

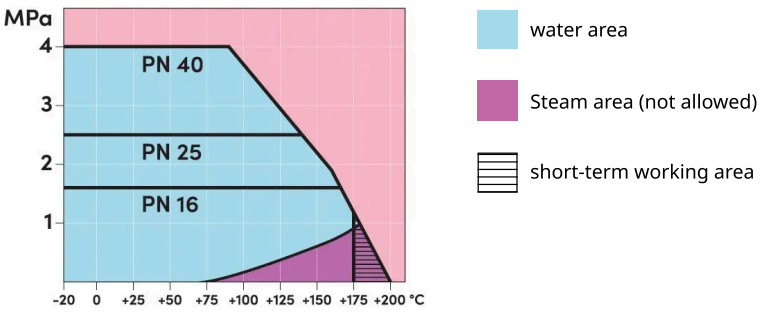


DN 15-25

Copyright © Vexve Oy - All rights reserved

Vexve steel ball valve

Series 101/G, male threads and plug / welding, EN (DIN), reduced bore, DN 15-25, PN 40

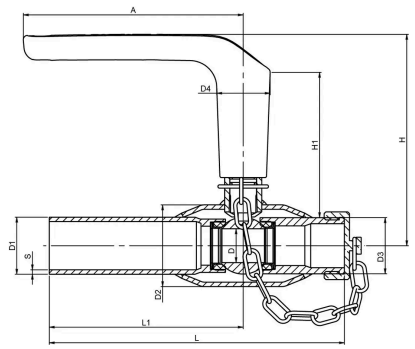

DN 15-25

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	D4	H	H1	L	L1	S	Kg
15	40	101015X/G34	130.0	10.0	21.3	33.7	G 3/4	32	119	84.0	167	115.0	2.0	0.6
15	40	101015X/G	130.0	10.0	21.3	33.7	G 1/2	32	119	84.0	167	115.0	2.0	0.6
20	40	101020X/G	130.0	15.0	26.9	42.4	G 3/4	32	119	81.0	172	115.0	2.3	0.8
25	40	101025X/G	130.0	20.0	33.7	48.3	G 1	32	125	84.0	175	115.0	2.6	0.9

Copyright © Vexve Oy - All rights reserved