Vexve control and shut-off butterfly valve

Series BRCW2, welding / welding, EN (DIN), reduced bore, DN 900-1200, PN 25



DN 900-1200

Materials

Body	DN 900-1200: Steel, P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1200: Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1200: 1.4542 + HCr plating
Stem	DN 900-1200: Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1200: Graphite
Bearing	DN 900-1200: PTFE + AISI 316 net

Mounting

welding / welding, EN (DIN)


Operation

DN 900-1200	manual gear

Operating conditions

Trim	25 bar
Temperature	-40 °C - +250 °C
Leakage rate	A or B (EN 12266-1) depending on requirement

DN 1200: -20 °C – +200 °C. Below 0 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

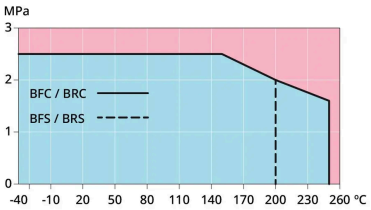


DN 900-1200


Copyright © Vexve Oy - All rights reserved

Vexve control and shut-off butterfly valve

Series BRCW2, welding / welding, EN (DIN), reduced bore, DN 900-1200, PN 25



DN 900-1200



DN 900-1200

Dimensions

DN	PN	Product no.	D	D1	H1	H2	H3	H4	H5	L	L1	L2	L3	Kg
900	25	BRC900W2	914.0	400	631.0	813	1098	623	1003	510	221.0	256	505	1122
1000	25	BRC1000W2	1016.0	400	678.0	879	1164	689	1069	550	224.0	256	506	1344
1200	25	BRC1200W2	1219.0	500	730.0	1043	1423	856	1304	580	285.0	250	632	2178

Copyright © Vexve Oy - All rights reserved