Vexve gas ball valve

Series 111, female threads / welding EN (DIN), reduced bore, DN 15-50, PN 40



DN 15-50

Materials

Body	DN 15-50: Steel, P235GH (1.0345)
Ball	DN 15-50: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50: PTFE+C
Stem	DN 15-50: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50: FPM/NBR

Mounting

female threads / welding EN (DIN)


Operation

DN 15-50	composite handle

Operating conditions

Temperature	-40 °C - +70 °C
Leakage rate	A (EN 12266-1)

Below -30 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

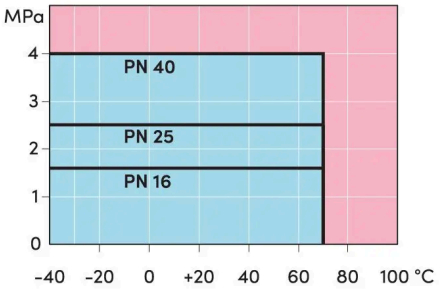


DN 15-50

Copyright © Vexve Oy - All rights reserved

Vexve gas ball valve

Series 111, female threads / welding EN (DIN), reduced bore, DN 15-50, PN 40

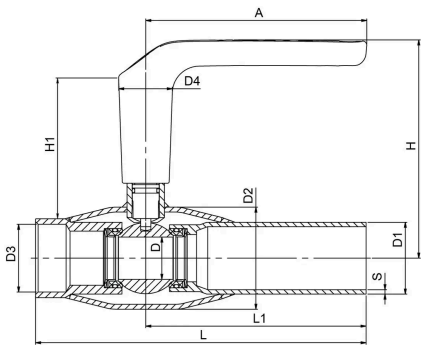

DN 15-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	D4	H	H1	L	L1	S	Kg
15	40	111015X	130.0	10.0	21.3	33.7	Rp 1/2	32	119	84.0	158	115.0	2.0	0.5
20	40	111020X	130.0	15.0	26.9	42.4	Rp 3/4	32	119	81.0	165	115.0	2.3	0.7
25	40	111025X	130.0	20.0	33.7	48.3	Rp 1	32	125	84.0	172	115.0	2.6	0.8
32	40	111032X	130.0	25.0	42.4	60.3	Rp 1 1/4	32	129	83.0	195	130.0	2.6	1.2
40	40	111040X	130.0	32.0	48.3	70.0	Rp 1 1/2	32	133	84.0	205	130.0	2.6	1.4
50	40	111050X	130.0	40.0	60.3	76.1	Rp 2	32	140	85.0	240	150.0	2.9	2.0

Copyright © Vexve Oy - All rights reserved