Vexve condensate valve

Series 172, female threads / female threads, reduced bore, DN 15-50, PN 40



DN 15-50

Materials

Body	DN 15-50: Steel, P235GH (1.0345)
Ball	DN 15-50: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50: PTFE+GF
Stem	DN 15-50: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50: FFKM/FFKM

Mounting

female threads / female threads


Operation

DN 15-50	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +250 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.
*) Not for superheated steam.

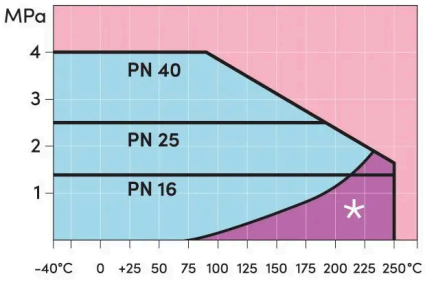


DN 15-50

Copyright © Vexve Oy - All rights reserved

Vexve condensate valve

Series 172, female threads / female threads, reduced bore, DN 15-50, PN 40



DN 15-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	H	H1	L	Kg
15	40	172015X	147.0	10.0	Rp 1/2	33.7	116	31.0	85	0.5
20	40	172020X	147.0	15.0	Rp 3/4	42.4	120	32.0	100	0.7
25	40	172025X	147.0	20.0	Rp 1	48.3	122	31.0	115	0.8
32	40	172032X	147.0	25.0	Rp 1 1/4	60.8	126	30.0	130	1.2
40	40	172040X	147.0	32.0	Rp 1 1/2	70.0	131	32.0	150	1.5
50	40	172050X	147.0	40.0	Rp 2	76.1	138	32.0	180	2.1

Copyright © Vexve Oy - All rights reserved