Vexve condensate valve

Series 174xx1/25, flange / flange, reduced bore, DN 125-150, PN 25



DN 125-150

Materials

Body	DN 125-150: Steel, P235GH (1.0345)
Ball	DN 125-150: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 125-150: PTFE+GF
Stem	DN 125-150: Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 125-150: FFKM/EPDM

Mounting

flange / flange	Available PN 10, 16, 25, 40


Operation

DN 125-150	manual gear

Operating conditions

Temperature -20 °C - +250 °C

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.
*) Not for superheated steam.

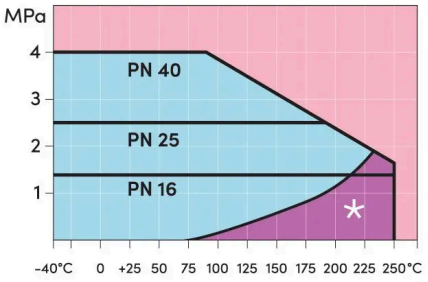


DN 125-150


Copyright © Vexve Oy - All rights reserved

Vexve condensate valve

Series 174xx1/25, flange / flange, reduced bore, DN 125-150, PN 25



DN 125-150



DN 125-150

Dimensions

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	Kg
125	25	174126/25	224.0	216	53	100.0	270	220	26	200	258	112.0	325	35
150	25	174151/25	224.0	236	53	125.0	300	250	26	200	279	118.0	350	44

Copyright © Vexve Oy - All rights reserved