Vexve stainless steel ball valve

Series 234xx1/25, flange / flange, reduced bore, DN 100-300, PN 25



DN 100-300

Materials

Body	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 100-300: PTFE+C
Stem	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 100-300: FPM/NBR

Mounting

flange / flange	EN 1092-1
	Available PN 10, 16, 25, 40


Operation

DN 100-300	manual gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

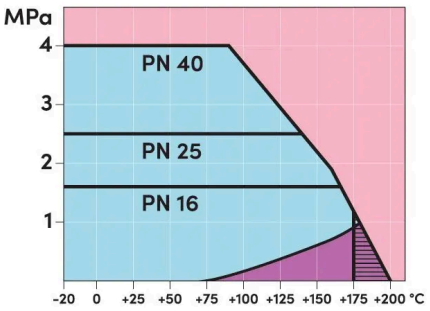


DN 100-300


Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 234xx1/25, flange / flange, reduced bore, DN 100-300, PN 25



DN 100-300



DN 100-300

Dimensions

DN	PN	Product no.	A	B	C	D	D1	D2	D3	D4	E	H1	L	Kg
100	25	234101/25	187.0	159	53	80.0	235	190	22	125	202	68.0	300	28
125	25	234126/25	224.0	183	53	100.0	270	220	26	200	225	79.0	325	34
150	25	234151/25	224.0	203	53	125.0	300	250	26	200	246	85.0	350	40
200	25	234201/25	268.0	244	69	150.0	360	310	26	250	293	92.0	400	66
250	25	234251/25	301.0	294	97	200.0	425	370	30	300	345	108.0	550	120
300	25	234301/25	424.0	349	138	250.0	485	430	30	600	422	132.0	565	191

NOTE: DN 250 and DN 300 allowed only for PED 2014/68/EU Group 1 and Group 2 fluids. Contact manufacturer if medium is gas or vapour.

Copyright © Vexve Oy - All rights reserved