Vexve condensate valve

Series 170, welding / welding, EN (DIN), reduced bore, DN 15-150, PN 25-40



DN 15-150

Materials

Body	DN 15-150: Steel, P235GH (1.0345)
Ball	DN 15-150: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-150: PTFE+GF
Stem	DN 15-100: Stainless steel, X8CrNiS18-9 (1.4305)
	DN 125-150: Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 15-50: FFKM/FFKM
	DN 65-150: FFKM/EPDM

Mounting

welding / welding, EN (DIN)


Operation

DN 15-150	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +250 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.
*) Not for superheated steam.

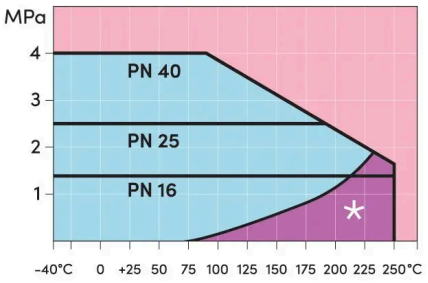


DN 15-150

Copyright © Vexve Oy - All rights reserved

Vexve condensate valve

Series 170, welding / welding, EN (DIN), reduced bore, DN 15-150, PN 25-40



DN 15-150

Dimensions

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	Kg
15	40	170015X	147.0	10.0	21.3	33.7	116	33.0	230	2.0	0.7
20	40	170020X	147.0	15.0	26.9	42.4	120	34.0	230	2.3	0.9
25	40	170025X	147.0	20.0	33.7	48.3	122	33.0	230	2.6	1.0
32	40	170032X	147.0	25.0	42.4	60.3	126	32.0	260	2.6	1.4
40	40	170040X	147.0	32.0	48.3	70.0	131	34.0	260	2.6	1.6
50	40	170050X	147.0	40.0	60.3	76.1	138	35.0	300	2.9	2.2
65	25	170065	278.0	50.0	76.1	101.6	156	62.0	300	2.9	3.9
80	25	170080	278.0	65.0	88.9	121.0	169	68.0	300	3.2	5.1
100	25	170100	278.0	80.0	114.3	139.7	218	100.0	325	3.6	8.5
125	25	170125	400.0	100.0	139.7	177.8	253	101.0	325	4.0	15.2
150	25	170150	600.0	125.0	168.3	219.1	272	107.0	350	4.5	20.4

Copyright © Vexve Oy - All rights reserved