Vexve trunnion mounted ball valve

Series 157/40/TR/HG, welding / welding, EN (DIN), full bore, DN 150-900, PN 40



DN 150-900

Materials

Body	DN 150-400: Steel, P355QH (1.0571) / P355NL1 (1.0566) / P355NH (1.0565)
	DN 450-900: Steel, P355QH (1.0571) / P355NH (1.0565)
Ball	DN 150-900: Steel + stainless plating, ASTM A350 LF2 +Ni
Ball seal	DN 150-900: PTFE+C
Stem	DN 150-900: Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 150-900: FPM
Top of Stem	DN 150-900: Stainless steel, X5CrNi18-10 (1.4301)

Mounting

welding / welding, EN (DIN)

Operation

DN 150-900	valves are available with angle gear standard hexagon adapter 27 or 32 mm


Equipments

DN 150-900 are equipped with: lifting lugs, mounting stand

Operating conditions

Temperature	0 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below 0 °C contact manufacturer. Lowest allowed ambient temperature -20 °C.

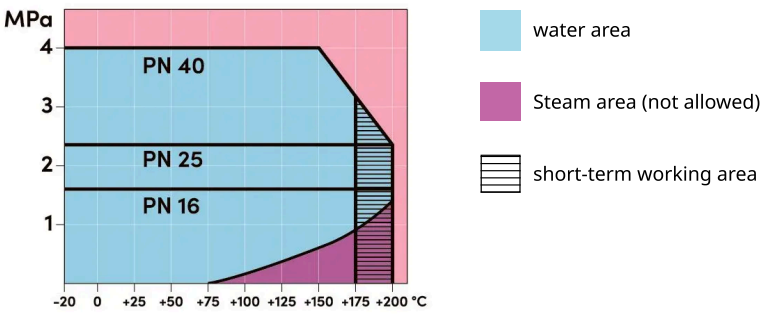


DN 150-900


Copyright © Vexve Oy - All rights reserved

Vexve trunnion mounted ball valve

Series 157/40/TR/HG, welding / welding, EN (DIN), full bore, DN 150-900, PN 40



DN 150-900



DN 150-900

Dimensions

DN	PN	Product no.	D	D1	D2	D4	D5	H1	H2	H3	H4	HS1	L	L1	L2	LS1	LS2	S	W1	W2	Kg
150	40	157150/40/TR/HG	150.0	168.3	315	98.0	88.9	494.0	410	317	717	200	457	84.0	149	229	160	4.5	81	198	153
200	40	157200/40/TR/HG	200.0	219.1	368	98.0	88.9	520.0	410	316	743	235	521	84.0	149	234	200	5.0	81	198	191
250	40	157250/40/TR/HG	250.0	273.0	440	110.0	114.3	568.0	432	338	795	280	559	118.0	183	250	240	5.0	125	233	296
300	40	157300/40/TR/HG	300.0	323.9	510	110.0	114.3	603.0	441	328	830	314	635	118.0	183	290	280	5.6	125	233	416
350	40	157350/40/TR/HG	340.0	355.6	590	135.0	139.7	695.0	517	375	924	360	762	138.0	222	348	320	6.3	150	235	663
400	40	157400/40/TR/HG	385.0	406.4	640	135.0	139.7	720.0	517	375	949	390	838	138.0	222	362	350	7.1	150	235	781
450	40	157450/40/TR/HG	436.0	457.0	740	219.1	219.1	720.0	492	316	947	530	914	182.0	267	456	400	6.3	188	236	1120
500	40	157500/40/TR/HG	487.0	508.0	822	244.5	244.5	761.0	507	312	989	580	991	179.0	262	472	420	6.3	188	364	1408
600	40	157600/40/TR/HG	589.0	610.0	980	244.5	244.5	840.0	535	312	1083	660	1143	253.0	337	524	450	7.1	255	498	2303
700	40	157700/40/TR/HG	684.0	711.0	1125	273.0	273.0	932.0	576	323	1183	700	1346	253.0	362	572	450	8.0	225	418	3372
800	40	157800/40/TR/HG	779.0	813.0	1290	298.0	298.0	1045.0	638	350	1441	840	1524	292.0	417	700	600	8.8	306	513	5228
900	40	157900/40/TR/HG	874.0	914.0	1440	298.0	298.0	1120.0	663	350	1516	750	1727	292.0	417	770	600	10.0	306	513	6655

For more information contact our customer service. Sizes DN 450-900 manufactured by ARMATURY Group a.s. - a member of Vexve.

Copyright © Vexve Oy - All rights reserved