

Vexve stainless steel ball valve

Series 230/MM, welding / welding, NS-norm, reduced bore, DN 10-100, PN 25-40



DN 10-50



DN 65-100

Materials

Body	DN 10-50: Stainless steel, AISI316L (1.4404)
	DN 65-100: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 10-50: Stainless steel, AISI316L (1.4404)
	DN 65-100: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 10-100: PTFE+C
Stem	DN 10-50: Stainless steel, AISI316L (1.4404)
	DN 65-100: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 10-100: FPM/NBR

Mounting

welding / welding, NS-norm


Operation

DN 10-50	composite handle
DN 65-100	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

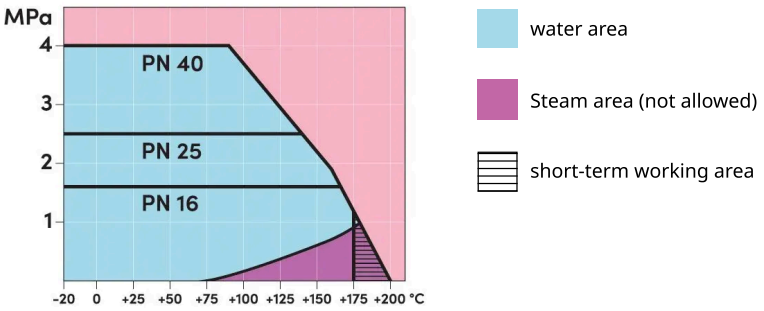


DN 10-100


Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 230/MM, welding / welding, NS-norm, reduced bore, DN 10-100, PN 25-40

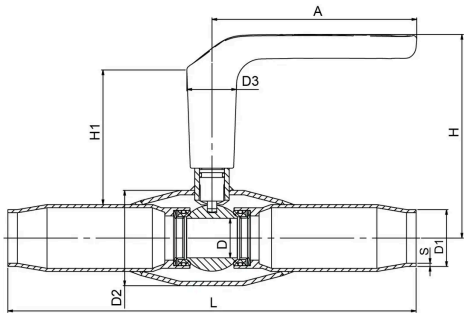

DN 10-50



DN 65-100

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	S	Kg
10	40	230010X/MM	130.0	10.0	13.5	33.7	32	119	86.0	230	1.6	0.5
15	40	230015X/MM	130.0	10.0	20.0	33.7	32	119	86.0	230	2.0	0.7
20	40	230020X/MM	130.0	15.0	25.0	42.4	32	123	87.0	230	2.0	0.9
25	40	230025X/MM	130.0	20.0	30.0	48.3	32	125	86.0	230	2.0	1.2
32	40	230032X/MM	130.0	25.0	36.0	60.3	32	129	85.0	260	2.0	1.7
40	40	230040X/MM	130.0	32.0	45.0	70.0	32	133	87.0	260	2.5	2.3
50	40	230050X/MM	130.0	40.0	54.0	76.1	32	140	88.0	300	2.6	3.4
65	25	230065/MM	278.0	50.0	70.0	114.3		150	55.0	300	3.0	3.8
80	25	230080/MM	278.0	65.0	86.0	114.3		160	59.0	300	3.1	4.7
100	25	230100/MM	278.0	80.0	106.0	139.7		171	59.0	325	3.0	6.7

Copyright © Vexve Oy - All rights reserved