Vexve stainless steel ball valve

Series 250, welding / welding, EN (DIN), full bore, DN 15-125, PN 25-40



DN 15-40



DN 50-125

Materials

Body	DN 15-40: Stainless steel, AISI316L (1.4404)
	DN 50-125: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 15-40: Stainless steel, AISI316L (1.4404)
	DN 50-125: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 15-125: PTFE+C
Stem	DN 15-40: Stainless steel, AISI316L (1.4404)
	DN 50-125: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 15-125: FPM/NBR

Mounting

welding / welding, EN (DIN)


Operation

DN 15-40	composite handle
DN 50-125	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

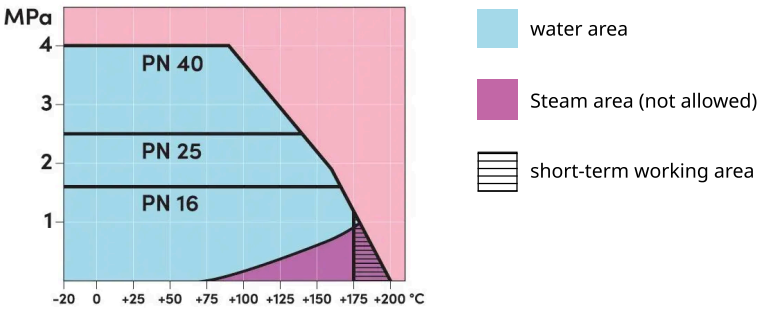


DN 15-125


Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 250, welding / welding, EN (DIN), full bore, DN 15-125, PN 25-40

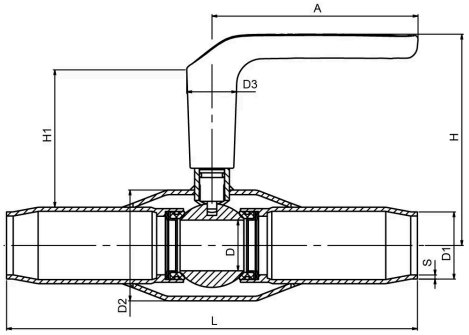

DN 15-40



DN 50-125

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	S	Kg
15	40	250015X	130.0	15.0	21.3	42.4	32	123	87.0	230	2.0	0.9
20	40	250020X	130.0	20.0	26.9	48.3	32	125	86.0	230	2.0	1.2
25	40	250025X	130.0	25.0	33.7	60.3	32	129	85.0	260	2.0	1.7
32	40	250032X	130.0	32.0	42.4	70.0	32	133	87.0	260	2.6	2.3
40	40	250040X	130.0	40.0	48.3	76.1	32	140	88.0	300	2.8	3.4
50	25	250050	278.0	50.0	60.3	114.3		147	59.0	300	3.0	3.7
65	25	250065	278.0	65.0	76.1	131.0		160	64.0	300	3.0	4.7
80	25	250080	278.0	80.0	88.9	139.7		170	67.0	325	2.9	6.7
100	25	250100	400.0	100.0	114.3	178.0		220	80.0	350	3.6	13.3
125	25	250125	400.0	125.0	139.7	219.1		241	88.0	400	4.0	20.9

Copyright © Vexve Oy - All rights reserved