
Vexve branching valve, hot tapping valve, stainless steel

Series 236, welding / welding, EN (DIN), reduced bore, DN 32-100, PN 25-40



DN 32-100

Materials

Body	DN 32-100: Stainless steel, AISI316L (1.4404)
Ball	DN 32-100: Stainless steel, AISI316L (1.4404)
Ball seal	DN 32-100: PTFE+C
Stem	DN 32-100: Stainless steel, AISI316L (1.4404)
Stem seal	DN 32-100: FPM/NBR

Mounting

welding / welding, EN (DIN)


Operation

DN 32-100	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

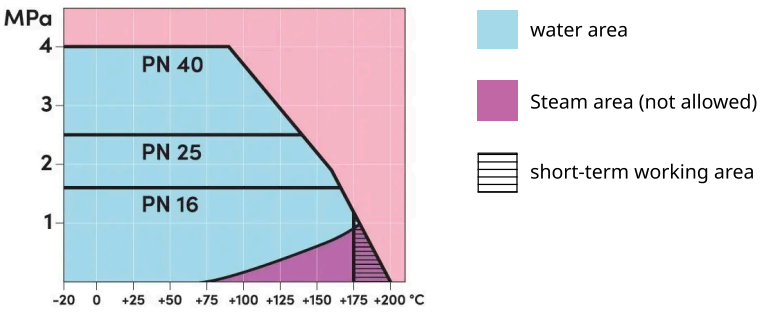


DN 32-100

Copyright © Vexve Oy - All rights reserved

Vexve branching valve, hot tapping valve, stainless steel

Series 236, welding / welding, EN (DIN), reduced bore, DN 32-100, PN 25-40



DN 32-100

Dimensions

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	Kg
32	40	236032	145.0	25.0	42.4	60.3	115	27.0	260	2.0	1.4
40	40	236040	188.0	32.0	48.3	70.0	112	34.0	260	2.6	2.3
50	40	236050	188.0	40.0	60.3	88.9	119	34.0	300	2.6	3.5
65	25	236065	278.0	50.0	76.1	114.3	145	51.0	300	3.0	4.5
80	25	236080	278.0	65.0	88.9	131.0	157	58.0	300	3.0	6.4
100	25	236100	279.0	80.0	114.3	156.0	170	54.0	325	3.0	8.7

Copyright © Vexve Oy - All rights reserved