Vexve steel ball valve

Series 302, female threads / copper, reduced bore, DN 20, PN 16



DN 20-20

Materials

Body	DN 20: Steel, P235GH (1.0345)
Solder connection	DN 20: Copper, EN 1057: 2006
Ball	DN 20: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 20: PTFE+C
Stem	DN 20: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 20: FPM

Mounting

female threads / copper


Operation

DN 20	composite T-handle

Operating conditions

Temperature	-20 °C - +120 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

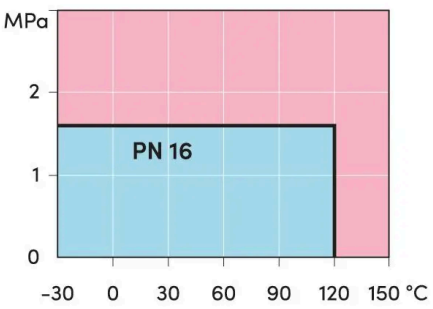


DN 15-50

Copyright © Vexve Oy - All rights reserved

Vexve steel ball valve

Series 302, female threads / copper, reduced bore, DN 20, PN 16



DN 20

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	Kg
20	16	302020X	90.0	15.0	42.4	Rp 3/4	32		22	109	62.0	152	102.0	1	0.6
20	16	302020X/18	90.0	15.0	42.4	Rp 3/4	32	18		109	62.0	152	102.0	1	0.6

Copyright © Vexve Oy - All rights reserved