Vexve trunnion mounted ball valve

Series 103/25/TR, flange / flange, reduced bore, DN 150-900, PN 25



DN 150-900

Materials

Body	DN 150-200: Steel P235GH (1.0345) / P355NH (1.0565)
	DN 250-500: Steel, P355QH (1.0571) / P355NL1 (1.0566) / P355NH (1.0565)
	DN 600-900: Steel, P355QH (1.0571) / P355NH (1.0565)
Ball	DN 150-900: Steel + stainless plating, ASTM A350 LF2 +Ni
Ball seal	DN 150-900: PTFE+C
Stem	DN 150-900: Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 150-900: FPM

Mounting

flange / flange	EN 1092-1
	Available PN 16, 25, 40

Operation

DN 150-200	zinc-plated steel handle
DN 250-900	available with manual gear or with an electric or hydraulic actuator

DN 250-900 : Valves are available with manual gear or with an electric or hydraulic actuator

Equipments

DN 150 are equipped with: drain valve, DN 200-900 are equipped with: lifting lugs, mounting stand


Drain valve:

DN 15 for DN 150–200 valves, DN 20 for DN 250-450 valves, DN 32 for DN 500-900 valves

Operating conditions

Temperature	0 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below 0 °C contact manufacturer. Lowest allowed ambient temperature -20 °C.

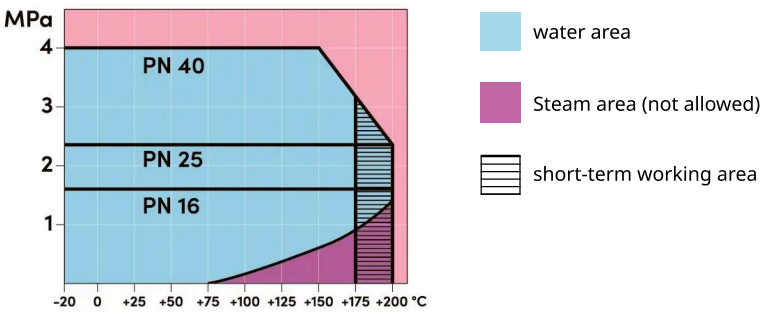

DN 150-900

Copyright © Vexve Oy - All rights reserved


Vexve trunnion mounted ball valve

Series 103/25/TR, flange / flange, reduced bore, DN 150-900, PN 25


Copyright © Vexve Oy - All rights reserved

Vexve trunnion mounted ball valve

Series 103/25/TR, flange / flange, reduced bore, DN 150-900, PN 25



DN 200-900



DN 200-900

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	E	H	H1	H2	H3	HS1	L	LS1	LS2	Kg
150	25	103150/25/TR	600.0	125.0	300	219.1		59.5	220	26		143.0	58			394			58
200	25	103200/25/TR	870.0	150.0	360	273.0		74.5	310	26	264	179.0	124		189	457	210	180	103
250	25	103250/25/TR		201.0	425	368.0	40	98.0	370	30		260.0	122	56	235	533	234	200	226
300	25	103300/25/TR		250.0	485	440.0	50	110.0	430	30		302.0	139	62	280	610	250	240	338
350	25	103350/25/TR		300.0	555	510.0	50	110.0	490	33		337.0	158	62	314	686	290	280	503
400	25	103400/25/TR		340.0	620	590.0	70	135.0	550	36		400.0	195	80	360	762	348	320	772
450	25	103450/25/TR		385.0	670	640.0	70	135.0	600	36		425.0	197	80	390	864	362	350	967
500	25	103500/25/TR		436.0	730	740.0	75	180.0	660	36		490.0	225	86	530	914	456	400	1158
600	25	103600/25/TR		487.0	845	822.0	90	200.0	770	39		537.0	222	88	580	1067	472	420	1600
700	25	103700/25/TR		589.0	960	980.0	98	200.0	875	42		616.0	235	88	660	1245	524	450	2570
800	25	103800/25/TR		684.0	1085	1125.0	98	230.0	990	48		722.0	302	111	700	1372	572	450	3622
900	25	103900/25/TR		779.0	1185	1290.0	120	270.0	1090	48		833.0	358	138	840	1524	700	600	5454

Also available in PN 40. For more information contact our customer service. Sizes DN 500-900 manufactured by ARMATURY Group a.s. - a member of Vexve.

Copyright © Vexve Oy - All rights reserved