Vexve balancing valve, stainless steel

Series 243/25, flange / flange, reduced bore, DN 65-300, PN 25



DN 65-150



DN 200-300

Materials

Body	DN 65-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-300: PTFE+GF
Stem	DN 65-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-300: FPM/NBR
Measuring block	DN 65-300: Self-sealing, stainless steel, X2CrNiMo17-12-2 (1.4404) / EPDM

Mounting

flange / flange	EN 1092-1
	Available PN 10, 16, 25, 40


Operation

DN 65-150	zinc-plated steel handle
DN 200-300	manual gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

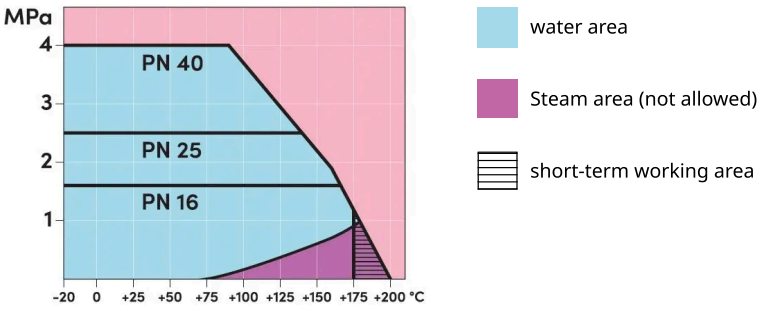


DN 65-300


Copyright © Vexve Oy - All rights reserved

Vexve balancing valve, stainless steel


Series 243/25, flange / flange, reduced bore, DN 65-300, PN 25



DN 65-150



DN 200-300



DN 200-300

Dimensions

DN	PN	Product no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	Kg
65	25	243065/25	280.0			185	145	18			148	58.0	82	310	110.0	10.8
80	25	243080/25	280.0			200	160	18			160	64.0	82	310	110.0	13.5
100	25	243100/25	280.0			235	190	22			173	52.0	82	350	122.5	19.5
125	25	243125/25	400.0			270	220	26			221	68.0	82	360	137.5	30.8
150	25	243150/25	600.0			300	250	26			240	74.0	82	390	150.0	36.0
200	25	243200/25	268.0	244	69	360	310	26	250	293		72.0	101	425	195.0	66.0
250	25	243250/25	301.0	294	97	425	370	30	300	345		88.0	107	550	256.0	113.0
300	25	243300/25	424.0	349	138	485	430	30	600	422		112.0	152	565	262.0	187.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.

Copyright © Vexve Oy - All rights reserved