Vexve shut-off butterfly valve

Series BRSF1, flange / flange, reduced bore, DN 900-1000, PN 16



DN 900-1000

Materials

Body	DN 900-1000: Steel, P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000: Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1000: 1.4542 + HCr plating
Stem	DN 900-1000: Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1000: FPM
Bearing	DN 900-1000: PTFE + AISI 316 net

Mounting

flange / flange	EN 1092-1


Operation

DN 900-1000	manual gear

Operating conditions

Body	PN 25
Trim	16 bar
Temperature	-40 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below 0 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

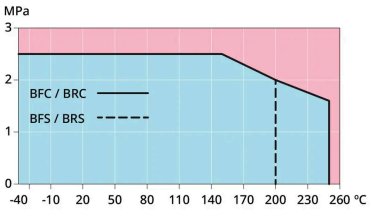


DN 300-800


Copyright © Vexve Oy - All rights reserved

Vexve shut-off butterfly valve

Series BRSF1, flange / flange, reduced bore, DN 900-1000, PN 16



DN 900-1000



DN 900-1000

Dimensions

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	L	L1	L2	L3	Kg
900	16	BRS900F1	1125.0	400	1050	39	631.0	853	948	623	754	344.0	256	505	1374
1000	16	BRS1000F1	1255.0	400	1170	42	678.0	919	1014	689	832	365.0	256	506	1740

Copyright © Vexve Oy - All rights reserved