
# Vexve gas ball valve

Series 304/GS, welding / welding, GOST, full bore, DN 200-400, PN 25





DN 200-400

## Materials

| | |
|---|---|
| **Body** | DN 200-400: Steel, P235GH (1.0345) |
| **Ball** | DN 200-400: Stainless steel, X5CrNi18-10 (1.4301) |
| **Ball seal** | DN 200-400: PTFE+C |
| **Stem** | DN 200-400: Stainless steel, X8CrNiS18-9 (1.4305) |
| **Stem seal** | DN 200-400: NBR |

## Mounting

welding / welding, GOST

## Operation


| | |
|---|---|
| **DN 200** | zinc-plated steel handle |
| **DN 250-400** | available with manual gear or with an electric or hydraulic actuator |

We recommend manual gear operation for sizes DN 200 and larger.

## Operating conditions

| | |
|---|---|
| **Temperature** | -40 °C - +70 °C |
| **Leakage rate** | A (EN 12266-1) |

Below -30 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

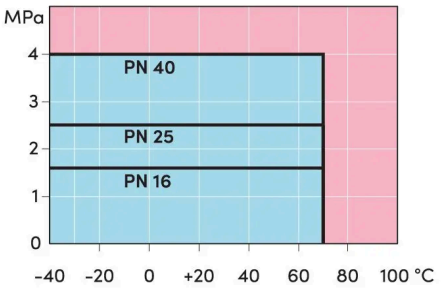


DN 200-400




Copyright © Vexve Oy - All rights reserved


# Vexve gas ball valve

Series 304/GS, welding / welding, GOST, full bore, DN 200-400, PN 25






**DN 150-300**




**DN 350-400**

## Dimensions

| DN | PN | Product no. | A | D | D1 | D2 | H | H1 | L | S | Kg |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 200 | 25 | 304200/GS | 1200.0 | 200.0 | 219 | 355.6 | 343 | 135.0 | 400 | 5 | 60 |
| 250 | 25 | 304250/GS | | 250.0 | 273 | 419.0 | | 158.0 | 530 | 6 | 88 |
| 300 | 25 | 304300/GS | | 290.0 | 325 | 508.0 | | 206.0 | 686 | 7 | 177 |
| 350 | 25 | 304350/GS | | 340.0 | 377 | 610.0 | | 267.0 | 762 | 7 | 258 |
| 400 | 25 | 304400/GS | | 390.0 | 426 | 660.0 | | 300.0 | 914 | 7 | 547 |



Copyright © Vexve Oy - All rights reserved