
Vexve branching valve

Series 120, welding / welding, EN (DIN), reduced bore, DN 20-250, PN 25-40



DN 20-250

Materials

Body	DN 20-250: Steel, P235GH (1.0345)
Ball	DN 20-200: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 20-250: PTFE+C
Stem	DN 20-250: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 20-250: FPM

Mounting

welding / welding, EN (DIN)


Operation

DN 20-250	with a socket wrench

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

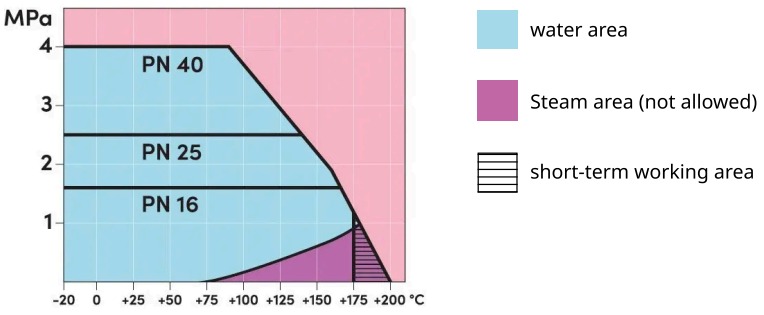


DN 20-250

Copyright © Vexve Oy - All rights reserved

Vexve branching valve

Series 120, welding / welding, EN (DIN), reduced bore, DN 20-250, PN 25-40



DN 20-200

Dimensions

DN	PN	Product no.	D	D1	D2	H	H1	L	S	HEX1	HEX2	Kg
20	40	120020	15.0	26.9	42.4	36	18.0	230	2.3		19	0.8
25	40	120025	20.0	33.7	48.3	40	19.0	230	2.6	9	22	0.8
32	40	120032	25.0	42.4	60.3	45	19.0	260	2.6	9	22	1.3
40	40	120040	32.0	48.3	70.0	50	21.0	260	2.6	9	22	1.4
50	40	120050	40.0	60.3	76.1	56	21.0	300	2.9	9	22	2.0
65	25	120065	50.0	76.1	101.6	74	30.0	300	2.9	15	32	3.3
80	25	120080	65.0	88.9	121.0	87	36.0	300	3.2	15	32	4.6
100	25	120100	80.0	114.3	146.0	104	46.0	325	3.6	15	36	7.2
125	25	120125	100.0	139.7	177.8	123	47.0	325	4.0	19	41	12.1
150	25	120150	125.0	168.3	219.1	143	53.0	350	4.5	19	41	16.6
200	25	120200	150.0	219.1	273.0	173	58.0	390	4.5	32	65	31.0
250	25	120250	200.0	273.0	355.6	220	76.0	530	5.0	32	65	66.0

Copyright © Vexve Oy - All rights reserved