Vexve trunnion mounted ball valve

Series 157/40/S/TR, welding / welding, EN (DIN), full bore, DN 150-400, PN 40



DN 150-400

Materials

Body	DN 150-400: Steel, P355QH (1.0571) / P355NL1 (1.0566) / P355NH (1.0565)
Ball	DN 150-400: Steel + stainless plating, ASTM A350 LF2 +Ni
Ball seal	DN 150-400: PTFE+C
Stem	DN 150-400: Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 150-400: FPM
Top of Stem	DN 150-400: Stainless steel, X5CrNi18-10 (1.4301)

Mounting

welding / welding, EN (DIN)

Operation

DN 150-400 available with portable planet gear

We recommend angle gear operation for sizes DN 150 and larger.


Equipments

DN 150-400 are equipped with: lifting lugs, mounting stand

Operating conditions

Temperature	0 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below 0 °C contact manufacturer. Lowest allowed ambient temperature -20 °C.

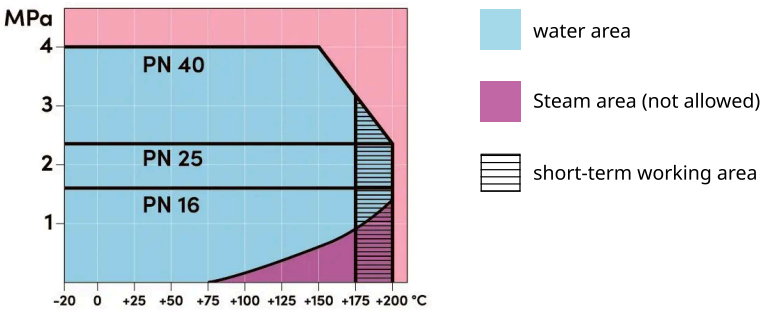


DN 150-400


Copyright © Vexve Oy - All rights reserved

Vexve trunnion mounted ball valve

Series 157/40/S/TR, welding / welding, EN (DIN), full bore, DN 150-400, PN 40



DN 150-400



DN 150-400

Dimensions

DN	PN	Product no.	D	D1	D2	D4	D5	H1	H2	H3	HS1	L	LS1	LS2	S	6K1	6K2	Kg
150	40	157150/40/S/TR	150.0	168.3	315	98	88.9	524.0	440	335	200	457	229	160	4.5	50	90	127
200	40	157200/40/S/TR	200.0	219.1	368	98	88.9	550.0	440	335	235	521	234	200	5.0	50	90	165
250	40	157250/40/S/TR	250.0	273.0	440	110	114.3	629.0	492	377	280	559	250	240	5.0	50	90	256
300	40	157300/40/S/TR	300.0	323.9	510	110	114.3	664.0	502	377	314	635	290	280	5.6	50	90	376
350	40	157350/40/S/TR	340.0	355.6	590	135	139.7	645.0	467	318	360	762	348	320	6.3	50	90	603
400	40	157400/40/S/TR	385.0	406.4	640	135	139.7	670.0	466	318	390	838	362	350	7.1	50	90	721

Copyright © Vexve Oy - All rights reserved