Vexve underground ball valve, air release valve / long

Series 231/IP, female threads / welding EN (DIN), reduced bore, DN 20-50, PN 25



DN 20-50

Materials

Body	DN 20-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Extension pipe	DN 20-50: Steel, P235GH (1.0345)
Ball	DN 20-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 20-50: PTFE+C
Stem	DN 20-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 20-50: FPM/NBR
Plug	DN 20-50: DZR brass

Mounting

female threads / welding EN (DIN)

Operation

DN 20-50	composite 6k19 positioning arrow (standard color blue, red available)


Equipments

DN 20-50 are equipped with: plug

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

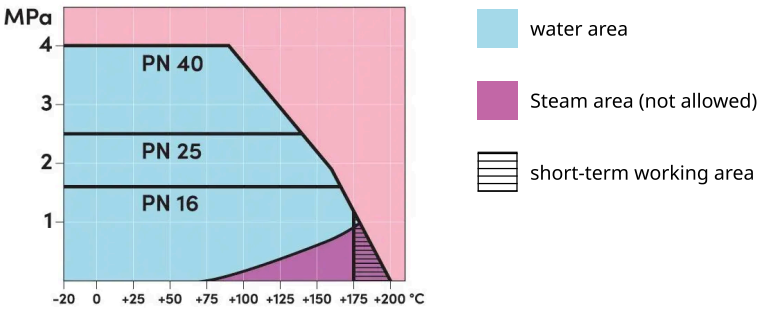


DN 20-50

Copyright © Vexve Oy - All rights reserved

Vexve underground ball valve, air release valve / long

Series 231/IP, female threads / welding EN (DIN), reduced bore, DN 20-50, PN 25



DN 20-50

Dimensions

DN	PN	Product no.	D	D1	D2	H	H1	L	L1	L2	L3	S	S1	HEX	HEX19	R	Kg
20	25	231020X/IP	15.0	26.9	42.4	80	25.0	500	484.0	434	351	2.6	4.0	19	19	3/4"	1.5
25	25	231025X/IP	20.0	33.7	48.3	82	23.0	500	482.0	425	342	2.6	4.0	19	19	1"	2.0
32	25	231032X/IP	25.0	42.4	60.3	86	23.0	500	479.0	414	305	2.6	4.5	19	19	1 1/4"	3.0
40	25	231040X/IP	32.0	48.3	70.0	91	24.0	500	479.0	403	299	2.6	4.5	27	19	1 1/2"	3.4
50	25	231050X/IP	40.0	60.3	76.1	98	25.0	500	476.0	386	278	2.9	4.0	27	19	2"	4.3

Copyright © Vexve Oy - All rights reserved