Vexve condensate valve

Series 171, female threads / welding EN (DIN), reduced bore, DN 15-50, PN 40



DN 15-50

Materials

Body	DN 15-50: Steel, P235GH (1.0345)
Ball	DN 15-50: Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50: PTFE+GF
Stem	DN 15-50: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50: FFKM/FFKM

Mounting

female threads / welding EN (DIN)


Operation

DN 15-50	zinc-plated steel handle

Operating conditions

Temperature	-20 °C - +250 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.
*) Not for superheated steam.

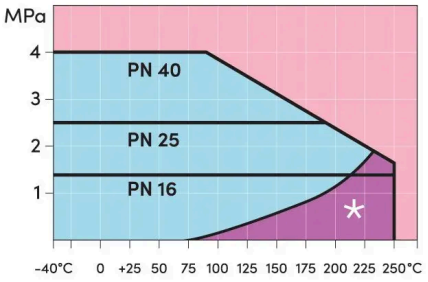


DN 15-50

Copyright © Vexve Oy - All rights reserved

Vexve condensate valve

Series 171, female threads / welding EN (DIN), reduced bore, DN 15-50, PN 40



DN 15-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	L1	S	Kg
15	40	171015X	147.0	10.0	21.3	33.7	Rp 1/2	116	33.0	158	115.0	2.0	0.6
20	40	171020X	147.0	15.0	26.9	42.4	Rp 3/4	120	34.0	165	115.0	2.3	0.8
25	40	171025X	147.0	20.0	33.7	48.3	Rp 1	122	33.0	172	115.0	2.6	0.9
32	40	171032X	147.0	25.0	42.4	60.3	Rp 1 1/4	126	32.0	195	130.0	2.6	1.3
40	40	171040X	147.0	32.0	48.3	70.0	Rp 1 1/2	131	34.0	205	130.0	2.6	1.5
50	40	171050X	147.0	40.0	60.3	76.1	Rp 2	138	35.0	240	150.0	2.9	2.1

Copyright © Vexve Oy - All rights reserved