Vexve stainless steel ball valve

Series 238, press fit / press fit, EN (DIN), reduced bore, DN 15-50, PN 16



DN 15-50

Materials

Body	DN 15-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 15-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 15-50: PTFE+C
Stem	DN 15-50: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 15-50: FPM/NBR

Press fit connection’s O-ring (LBP) DN 15-50 : CIIR

Mounting

press fit / press fit, EN (DIN)


Operation

DN 15-50	composite handle

Operating conditions

Temperature	-20 °C - +120 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

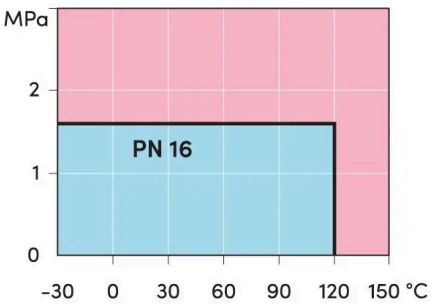


DN 15-50

Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 238, press fit / press fit, EN (DIN), reduced bore, DN 15-50, PN 16



DN 15-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	L1	Kg
15	16	238015X	130.0	10.0	21.3	33.7	32	119	86.0	230	20.0	0.6
20	16	238020X	130.0	15.0	25.3	42.4	32	123	88.0	230	21.0	0.7
25	16	238025X	130.0	20.0	31.3	48.3	32	125	87.0	230	23.0	0.9
32	16	238032X	130.0	25.0	38.4	60.3	32	129	87.0	230	26.0	1.2
40	16	238040X	130.0	32.0	45.4	70.0	32	134	88.0	250	30.0	1.5
50	16	238050X	130.0	50.0	57.5	76.1	32	141	89.0	250	35.0	2.1

Copyright © Vexve Oy - All rights reserved