Vexve stainless steel ball valve

Series 234, welding / welding, EN (DIN), reduced bore, DN 100-300, PN 25



DN 100-300

Materials

Body	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 100-300: PTFE+C
Stem	DN 100-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 100-300: FPM/NBR

Mounting

welding / welding, EN (DIN)


Operation

DN 100-300	manual gear

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

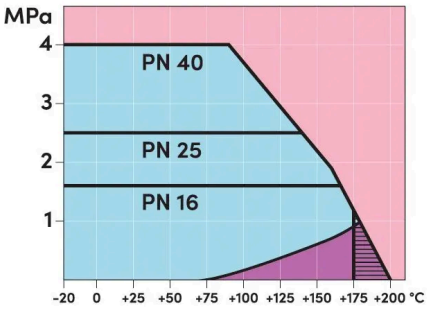


DN 100-300


Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 234, welding / welding, EN (DIN), reduced bore, DN 100-300, PN 25



DN 100-300



DN 100-300

Dimensions

DN	PN	Product no.	A	B	C	D	D1	D2	D3	E	H1	L	S	Kg
100	25	234100	187.0	159	53	80.0	114.3	139.7	125	202	68.0	325	3.0	13
125	25	234125	224.0	183	53	100.0	139.7	178.0	200	225	79.0	325	4.0	20
150	25	234150	224.0	203	53	125.0	168.3	219.1	200	246	85.0	350	4.0	23
200	25	234200	268.0	244	69	150.0	219.1	273.0	250	293	92.0	400	4.0	40
250	25	234250	301.0	294	97	200.0	273.0	355.6	300	345	108.0	530	4.0	77
300	25	234300	424.0	349	138	250.0	323.9	457.0	600	422	132.0	550	6.1	139

NOTE: DN 250 and DN 300 allowed only for PED 2014/68/EU Group 1 and Group 2 fluids. Contact manufacturer if medium is gas or vapour.

Copyright © Vexve Oy - All rights reserved