Vexve control and shut-off butterfly valve

Series BRCF2, flange / flange, reduced bore, DN 900-1000, PN 25



DN 900-1000

Materials

Body	DN 900-1000: Steel, P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000: Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1000: 1.4542 + HCr plating
Stem	DN 900-1000: Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1000: Graphite
Bearing	DN 900-1000: PTFE + AISI 316 net

Mounting

flange / flange	EN 1092-1


Operation

DN 900-1000	manual gear

Operating conditions

Body	PN 25
Trim	25 bar
Temperature	-40 °C - +250 °C
Leakage rate	A or B (EN 12266-1) depending on requirement

Below 0 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

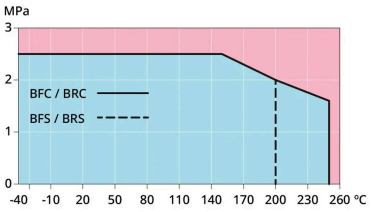


DN 900-1000


Copyright © Vexve Oy - All rights reserved

Vexve control and shut-off butterfly valve

Series BRCF2, flange / flange, reduced bore, DN 900-1000, PN 25



DN 900-1000



DN 900-1000

Dimensions

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	H5	L	L1	L2	L3	Kg
900	25	BRC900F2	1185.0	400	1090	48	631.0	813	1098	623	1003	814	374.0	256	505	1636
1000	25	BRC1000F2	1320.0	400	1210	56	678.0	879	1164	689	1069	878	388.0	256	506	2048

Copyright © Vexve Oy - All rights reserved