Vexve stainless steel ball valve

Series 231/NPT, female threads / welding EN (DIN), reduced bore, DN 10-50, PN 40



DN 10-50

Materials

Body	DN 10-50: Stainless steel, AISI316L (1.4404)
Ball	DN 10-50: Stainless steel, AISI316L (1.4404)
Ball seal	DN 10-50: PTFE+C
Stem	DN 10-50: Stainless steel, AISI316L (1.4404)
Stem seal	DN 10-50: FPM/NBR

Mounting

female threads / welding EN (DIN)


Operation

DN 10-50	composite handle

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

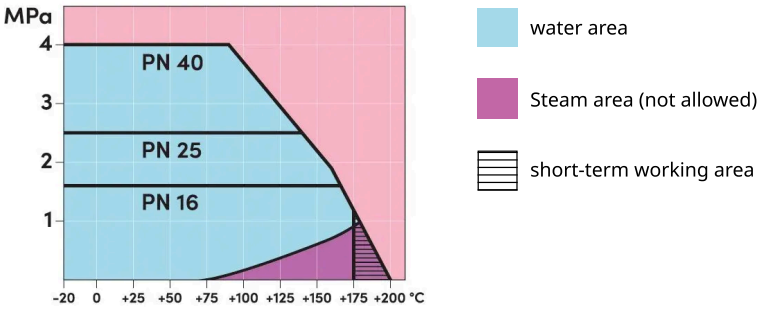


DN 10-50

Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 231/NPT, female threads / welding EN (DIN), reduced bore, DN 10-50, PN 40



DN 10-50

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	D4	H	H1	L	L1	S	Kg
10	40	231010X/NPT	130.0	10.0	17.2	33.7	NPT 3/8	32	119	86.0	153	115.0	2.0	0.4
15	40	231015X/NPT	130.0	10.0	21.3	33.7	NPT 1/2	32	119	84.0	158	115.0	2.0	0.5
20	40	231020X/NPT	130.0	15.0	26.9	42.4	NPT 3/4	32	123	85.0	165	115.0	2.0	0.6
25	40	231025X/NPT	130.0	20.0	33.7	48.3	NPT 1	32	125	84.0	172	115.0	2.0	0.8
32	40	231032X/NPT	130.0	25.0	42.4	60.3	NPT 1 1/4	32	129	83.0	195	130.0	2.0	1.2
40	40	231040X/NPT	130.0	32.0	48.3	70.0	NPT 1 1/2	32	133	84.0	205	130.0	2.6	1.6
50	40	231050X/NPT	130.0	40.0	60.3	76.1	NPT 2	32	140	85.0	240	150.0	2.6	2.4

Copyright © Vexve Oy - All rights reserved