
Vexve stainless steel ball valve

Series 233/25, flange / flange, reduced bore, DN 65-300, PN 25



DN 65-300

Materials

Body	DN 65-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-300: PTFE+C
Stem	DN 65-300: Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-300: FPM/NBR

Mounting

flange / flange	EN 1092-1
	Available PN 10, 16, 25, 40


Operation

DN 65-250	zinc-plated steel handle
DN 300	available with manual gear or with an electric or hydraulic actuator

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

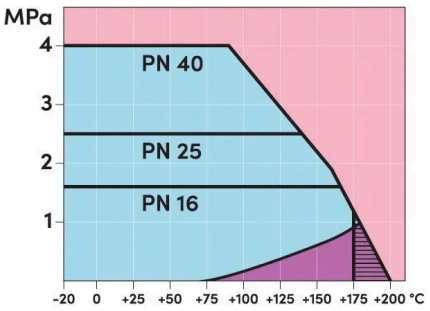


DN 65-300


Copyright © Vexve Oy - All rights reserved

Vexve stainless steel ball valve

Series 233/25, flange / flange, reduced bore, DN 65-300, PN 25



DN 65-150



DN 200-300

Dimensions

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	Kg
65	25	233065/25	278.0	50.0	185	145	18	148	51.0	270	11.0
80	25	233080/25	278.0	65.0	200	160	18	159	58.0	280	13.3
100	25	233100/25	278.0	80.0	235	190	22	171	54.0	300	18.9
125	25	233125/25	400.0	100.0	270	220	26	220	68.0	325	27.7
150	25	233150/25	600.0	125.0	300	250	26	240	74.0	350	35.9
200	25	233200/25	870.0	150.0	360	310	26	280	92.0	400	59.0
250	25	233250/25	1200.0	200.0	425	370	30	340	108.0	550	105.0
300	25	233300/25		250.0	485	430	30		133.0	565	156.0

NOTE: DN 250 and DN 300 allowed only for PED 2014/68/EU Group 1 and Group 2 fluids. Contact manufacturer if medium is gas or vapour.

Copyright © Vexve Oy - All rights reserved